

A WORLD FIRST

simalube® 15 ml – The smallest automatic single-point lubricator



simalube® 15 ml – For economical and reliable lubrication


The new lubricator is small, contains only 15 ml of lubrication, and functions with the exact same technology as the other **simalube®** lubricators. Because of its compact design, the **simalube®** 15 ml is a world first.

Advantages of the compact 15 ml single-point lubricator:

- Only 15 ml of lubrication
- Compact, space-saving design
- Operates with the same technology as the simalube 30, 60, 125 und 250 ml lubricators
- Robust aluminium housing






simalube®
smart lubrication

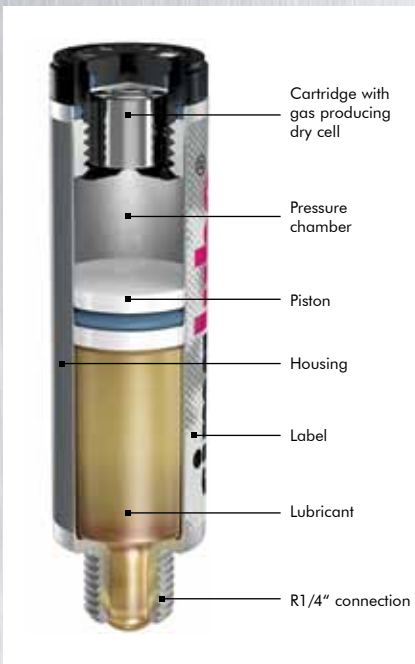

The worldwide patented **simalube®** lubricators reliably provide the lubrication points with the necessary amount of lubricant 24 hours a day. The lubricators are steplessly adjustable for a time setting between 1 and 12 months.

Take advantage of the benefits of the smallest automatic lubricator:

- **Space-saving and small:** Because of the small dimensions, the simalube 15 ml can be installed even in tight spaces.
- **Minimal lubrication:** The combination of 15 ml content with a freely selectable time setting of 1–12 months allows the 15 ml lubricator to continually dispense a very small amount of lubricant.
- **Alternative to the five-chamber simalube multipoint:** The simalube 15 ml offers an alternative to the simalube multipoint when less than five lubrication points need to be served.
- **Technology that has been tested millions of times:** The technology used in the simalube 15 ml is 1:1 the same as in the existing simlube product line, making the simalube 15 ml an absolutely reliable lubricator.

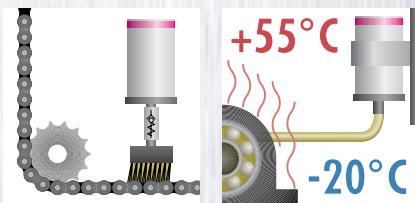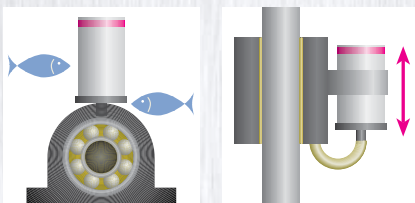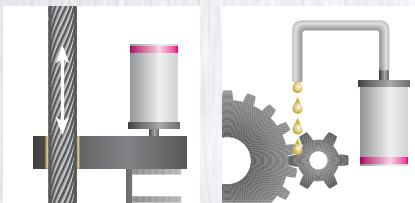

simalube® lubricants

No.	Application	Temp. range	Base oil	Thick-ener	DIN 51502
SL01	Multipurpose grease	-30/+120°C	Mineral oil	Li/Ca	KP2K-30
SL02	Multipurpose grease + MoS ₂	-25/+130°C	Mineral oil	Li	KPF2K-20
SL04	High temperature grease	-20/+160°C	Mineral oil	Be	K2P-20
SL06	Fluid grease	-20/+120°C	Mineral oil	Li/Ca	GP0G-20
SL09	Biodegradable grease	-20/+80/100°C	Ester oil	Li/Ca	KPE2G-20
SL10	Food industry grease	-30/+140°C	Synthetic	Al/comp	KPHC2N-30
SL14	Chain oil	-10/+90°C	Mineral oil		CGLP68
SL15	High temp. chain oil	-30/+250°C	Synthetic		CGLPE220-320
SL16	Machine oil	-20/+100°C	Mineral oil		CL68, HL68
SL18	Food industry oil	-15/+150°C	Synthetic		CLPHC220
SL19	Biodegradable chain oil	-15/+100°C	Ester oil		
SL24	Wide temp. range grease	-30/+150°C	Mineral oil	Li/comp	KP2N-30
SL25	High temp. grease	-20/+180°C	Mineral oil	Polyarea	KP2R-25
SL26	High performance grease	-20/+150°C	Mineral oil	Ca/comp	KP1,5N-20

simalube® single-point lubricator



simatec ag

Stadthof 2, CH-3380 Wangen a. Aare

Tel.: +41 (0)32 636 50 00

Fax: +41 (0)32 636 50 19

welcome@simatec.com

www.simatec.com

simatec

smart technologies