

SPACEA™ Series for Special Environments Ball Screws and NSK Linear Guides for Vacuum Environments

Ball Screws and NSK Linear Guides With E-DFO for Vacuum Environments

New!

Patent Pending

Ongoing evolution of DFO thin-film lubrication technology leads to significantly longer life and low outgassing in vacuum environments.



■ Features

1. Long life

Up to twenty times longer life than existing products.

2. Low outgassing

Outgassing is limited even in high vacuum environments.

3. Low friction


Friction is significantly reduced from existing products.

■ Operating environment


Maximum vacuum environment at room temperature	Recommended operating temperature range	Maximum instantaneous operating temperature (less than 10 hours)
10 ⁻⁶ Pa	-40—125°C	200°C

Long life Up to twenty times longer life than existing products means longer maintenance intervals.

Ball screw durability test result

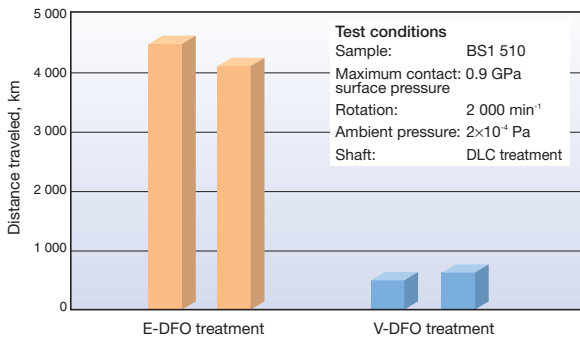


Linear guide durability test result

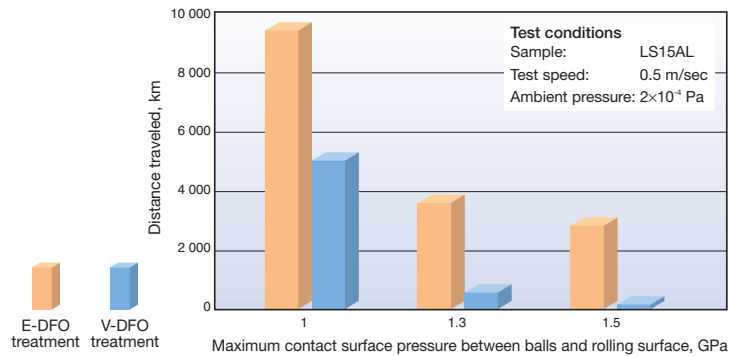

Low outgassing Outgassing is limited even in high vacuum environments.

Outgassing analysis result (quadruple mass spectrometer)


Test conditions
 Measurement temperature: 100 °C
 Ambient pressure: 10⁻⁵ Pa or less

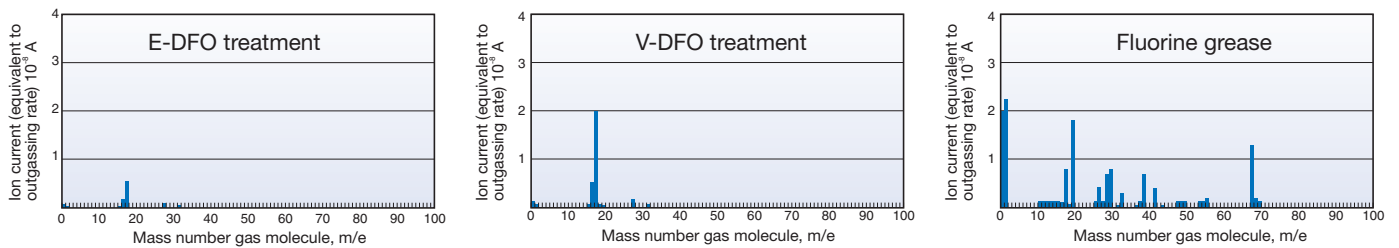

Low friction Friction is significantly reduced from existing products, thereby reducing motor loads and helping to produce efficient equipment.

Linear guide dynamic friction measurement results

Test conditions
 Sample: LH15BN
 Preload: Z1 (326N)
 Stroke: 800 mm
 Measurement temperature: 20°C
 Ambient pressure: Atmospheric

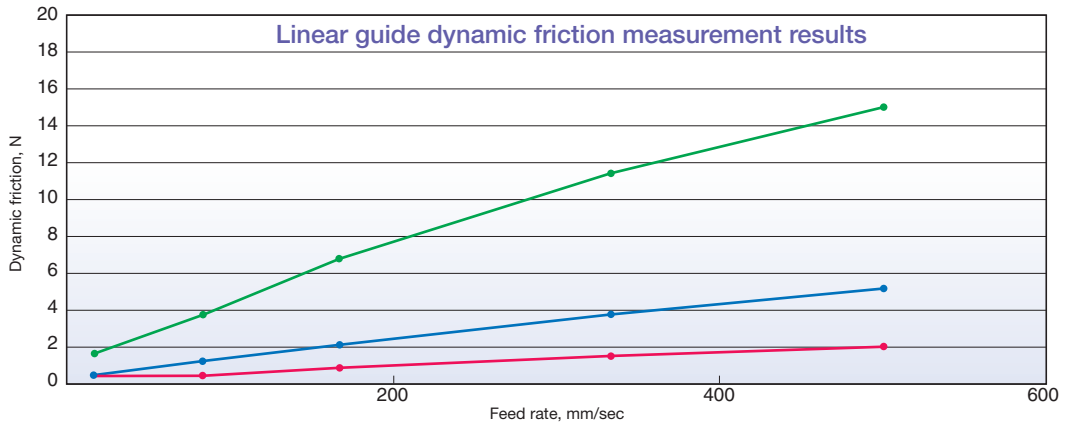

Applications

Wafer inspection equipment, SED manufacturing equipment, ion implanter, IC stepper lighting systems, work handling component for optical measuring equipment, ion steppers, coating equipment, vacuum monochromator, lens inspection equipment, vacuum inspection equipment, etc.

* All these products are manufactured to order. For details, please contact NSK.

For more information about NSK products, please contact: www.nsk.com



Printed on 100% recycled paper.