

01

Cross Roller Bearing

- Introduction & Model Selection _____ P.04
- Model Characteristics & Features _____ P.05-06
- Formulas _____ P.07-11
- Installation Procedure & Precautions _____ P.12-13
- Accuracy Standards _____ P.14
- Rotational Accuracy _____ P.15-16
- Dimensional Tolerance _____ P.17
- SRAUF Tolerance & Accuracy _____ P.18
- Radial Clearance _____ P.19
- Model Number Composition _____ P.20-30

02

Gonio Way

- Introduction & Characteristics _____ P.34
- Accuracy Standards _____ P.35
- Rated Life _____ P.36
- Precautions _____ P.37
- Slideway structure & installation procedures _____ P.38-39
- Model Number Composition _____ P.40-41

03

References

- Applications & Demonstration _____ P.44-46

A decorative light blue swoosh graphic that curves around the central text, starting from the bottom left and ending at the top right.

01

Cross Roller Bearing

Cross Roller Bearing


Cross roller bearings consist of inner rings, outer rings, spacer retainers and cylindrical rollers cross arranged on the V-shaped 90° groove between the inner and outer rings. This structure can withstand radial, axial and moment loads in all directions because the rollers' line contact with raceway surfaces achieve a large load-bearing area despite the minimum dimensions. Therefore these bearings are widely used on the rotating parts of industrial robots, machine tools, precision rotary tables, measuring instruments and IC manufacturing machines.

Product Features

- High rigidity
- Large load capacity
- High rotation accuracy
- Compactness
- Easy to install and handle

Cross Roller Bearing selection

The procedures for the selection and usage of cross roller bearings are based on the following figure

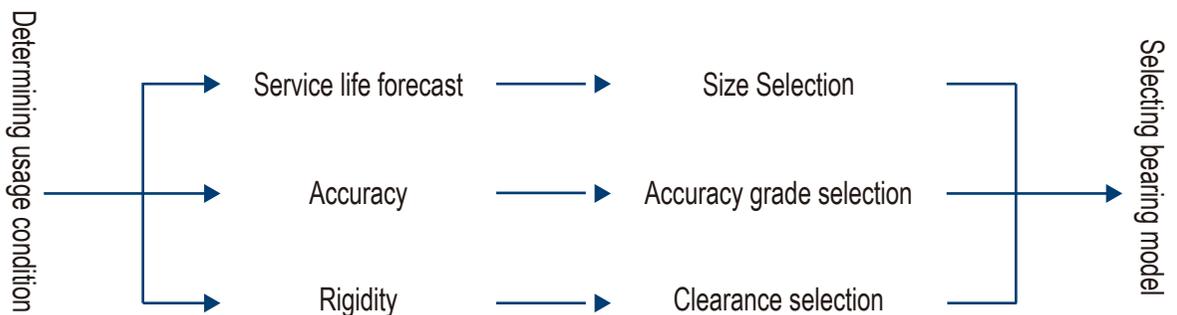

Models & Features



SRU Model (One-Piece Inner & Outer Ring)

The single structure with mounting holes on inner and outer rings does not require the use of flange discs or housings; therefore reduces mounting errors, achieves stable rotational accuracy and moment torque. Suitable for inner and outer ring rotation



SRB models (Split Outer Ring model for inner ring rotation)

Standard model with two split outer rings bolted together and a one-piece inner ring suitable for precision inner ring rotation.



SRBE Model (One-Piece Inner & Outer Ring)

The one-piece inner & outer ring structure provides high rigidity, high accuracy and smooth rotation; suitable for inner and outer ring rotation



SRAU Model (One-Piece Inner & Outer Ring)

Super slim type cross roller bearing with three options of bearing width: 5mm, 8mm and 13mm. Rigid and compact design is suitable for limited space and lightweight mechanism.



SRAUF (One-Piece Inner & Outer Ring)

Super slim cross roller bearing with mounting holes. Designs for easy installation that significantly reduces equipment weight and size.



SSHF Model (One-Piece Inner & Outer Ring)

Specifically designed for SHF type strain wave gears, this cross roller bearing has mounting holes for easy installation.



SCSG Model (Split outer ring)

Specifically designed for CSG type strain wave gears, this cross roller bearing has mounting holes for easy installation.

Basic Rated Life

The 90% of a group of identical Cross Roller Bearings can operate individually under the same conditions without showing material damage such as flaking caused by rolling fatigue. The basic rated life is represented by the total service hours for rotations at a constant rotational speed.

The service life of the cross roller bearing is calculated using the following formula:

L : basic rated life

C : basic dynamic load rating

P : dynamic-equivalent load

$$L = \left(\frac{C}{P} \right)^{\frac{10}{3}}$$

The number of revolutions is expressed in the unit of 10^6 (rev)

Dynamic Equivalent Radial Load : P

The dynamic-equivalent radial load on cross roller bearings is calculated using the following formula:

P : dynamic-equivalent radial load (kN)

Fr : radial load (kN)

Fa : axial load (kN)

M : moment (kN·mm)


X : dynamic radial coefficient (see table1)

Y : dynamic axial coefficient (see table1)

dw : pitch circle diameter of rollers (mm)

$$P = X \cdot \left(Fr + \frac{2M}{dw} \right) + Y \cdot Fa$$

Dynamic Equivalent Radial Load : P

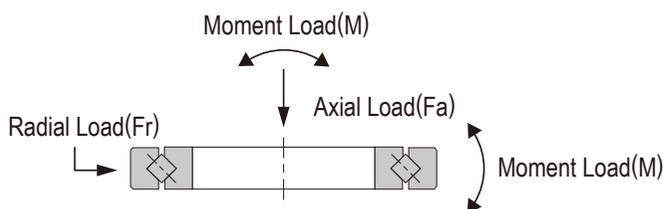

(table 1)

Dynamic radial and axial coefficients

| Categories | X | Y |
|--------------------------------|------|------|
| $\frac{Fa}{Fr+2M/dw} \leq 1.5$ | 1 | 0.45 |
| $\frac{Fa}{Fr+2M/dw} > 1.5$ | 0.67 | 0.67 |

An example for rated life calculation

Calculate the rated life when bearings are used under the following conditions

ID : $d=110$ (mm) $W_1 = 700$ (N) $Fr = 2500$ (N)
 OD : $D=160$ (mm) $W_2 = 2000$ (N) $L = 700$ (mm)

Example: Model SRB11020

Pitch circle diameter : $d_w = 135$ (mm)

Basic dynamic load rating $C = 34000$ N


Basic static load rating $C_0 = 54000$ N

Radial load : $Fr = 2500$ (N)

Axial load : $F_a = W_1 + W_2 = 700 + 2000 = 2700$ (N)

Moment load : $M = W_1 \times L = 700 \times 700 = 490000$ (N·mm)

PCD : $d_w = (d+D)/2 = (110+160)/2 = 135$ (mm)

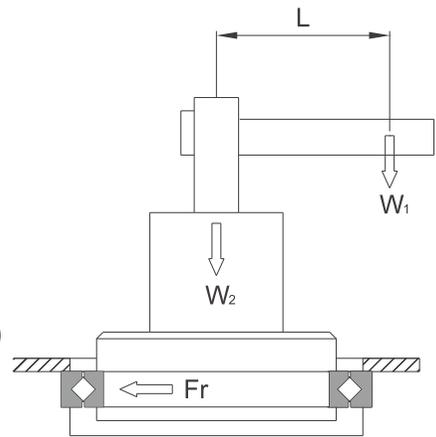

$$\frac{F_a}{Fr+2M/d_w} = \frac{2700}{2500+2 \times 490000/135} \cong 0.2766 < 1.5$$

Hence, if radial load coefficient: $x=1$, axial load

coefficient: $y=0.45$, then dynamic-equivalent radial load:

$$P = X \cdot \left(Fr + \frac{2M}{d_w} \right) + Y \cdot F_a = 1 \times \left(2500 + \frac{2 \times 490000}{135} \right) + 0.45 \cdot 2700 = 10974 \text{ (N)}$$

$$\text{Basic rated life} : L = \left(\frac{C}{P} \right)^{\frac{10}{3}} = \left(\frac{34000}{10974} \right)^{\frac{10}{3}} = 43.35 \text{ (} \times 10^6 \text{ rev)}$$

Static safety coefficient

This coefficient is determined by the basic static rated load (C_0) and static-equivalent radial load (P_0). When a load is statically or dynamically applied, the static safety coefficients shown in the following figure should be considered.

f_s : static safety coefficient

C_0 : basic static rated load (kN)

P_0 : static equivalent radial load (kN)

$$\frac{C_0}{P_0} = f_s$$

(f_s) Static safety coefficient

| Load conditions | Lower Limit of f_s |
|-----------------|----------------------|
| Normal load | 1~2 |
| Impact load | 2~3 |

Static equivalent radial load : P_0

The cross roller bearing's static equivalent radial load is calculated using the following formula.

P_0 : Static-equivalent radial load (kN)

F_r : radial load (kN)

F_a : axial load (kN)

M : moment (kN·mm)

X_0 : static radial coefficient ($X_0=1$)

Y_0 : static axial coefficient ($Y_0=0.44$)

d_w : pitch circle diameter of rollers (mm)

$$P_0 = X_0 \cdot \left(F_r + \frac{2M}{d_w} \right) + Y_0 \cdot F_a$$

Fit

Fitting of Models SRU

Fitting of Models SRU Fitting required positioning accuracy, h7 and H7 are recommended.

Fitting of Models SRAU

Fitting of Models SRAU Fitting required positioning accuracy, g5 and g6 for the shaft and H7 for the housing are recommended.

*Note: When using a Model SRAU (width 5 mm type), there is no interference on design devices.

Fitting of Models SRB&SRBE

| Radial Clearance | Service Conditions | | Shaft | Housing |
|------------------|----------------------------|-------------------------|-------|---------|
| S1 | Inner ring rotational load | Normal Load | g5 | H7 |
| | | Large impact and moment | | |
| | Outer ring rotational load | Normal Load | | |
| | | Large impact and moment | | |
| C1 | Inner ring rotational load | Normal Load | h5 | H7 |
| | | Large impact and moment | | |
| | Outer ring rotational load | Normal Load | g5 | Js7 |
| | | Large impact and moment | | |

*Note: For the fitting for clearance S1, please avoid interference because it will cause an excessive preload. In addition, if higher rigidity is required, we recommend measuring the inner and outer diameters of the bearing and applying a slight interference fit to match the diameters.

Methods and design of the housing and flange disc

Due to the thin wall structure of the cross roller bearings, full consideration must be given to the rigidity of the housing and flange discs. With split type bearings, if the housing or flange disc is not rigid enough, the inner ring or outer ring cannot be evenly held, resulting bearing deformation when moment load is applied. Therefore, the contact area of the rollers will become uneven, causing significant decrease in bearing performance.

To prevent this from occurring, it is recommended to design the housing and flange discs by the following methods:


Housing: at least 60% of the sectional height of the cross roller bearing

Housing wall thickness :
$$T = \frac{(D-d)}{2} \times 0.6 \text{ or greater}$$

(D: outer diameter of the outer ring; d: inner diameter of the inner ring)

Tapped hole for bearing removal

Alternatively, tapped holes for removing bearings may be set up on the housing; when it is necessary to remove the bearings from housing, the screws may be locked into the tapped holes to push the bearing out without incurring any damage.

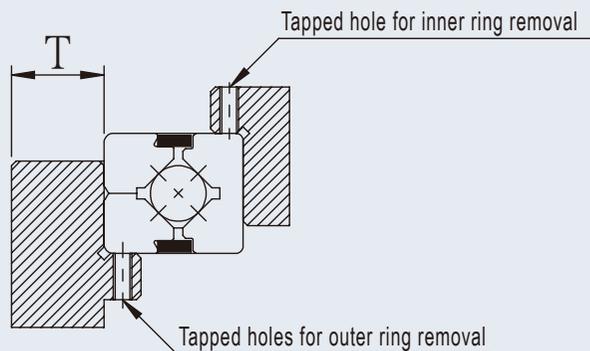


Flange discs and locking screws

The values of the wall thickness (F) or the clearance (S) of the flange discs may be designed per the following formula. As for the quantity of locking screws, it may be configured at equal intervals by using the quantity shown in table (1).

$$F = B \times 0.5 \sim B \times 1.2$$

$$H = B_{-0.01}^0$$

$$S = 0.5 \text{ mm}$$

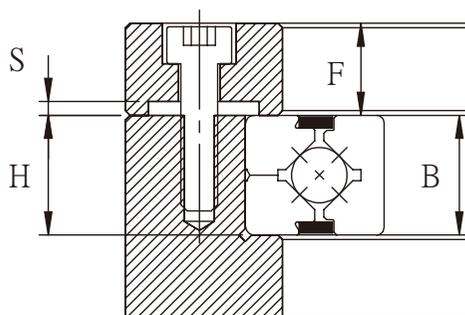

It is recommended to secure the flange discs using materials made of iron. It is advised to firmly lock the screws using torque wrenches. See table (2) for the locking torques of supporting seats or supported flange discs which are made of medium hardness steel.

Table 1. Number of locking screws and size.

Unit : mm

| Outer diameter of the outer ring (D) | | Number of screws | Screw size (base value) |
|--------------------------------------|-------|------------------|-------------------------|
| Above | Below | | |
| - | 100 | 8 or more | M3~M5 |
| 100 | 200 | 12 or more | M4~M8 |
| 200 | 500 | 16 or more | M5~M12 |
| 500 | - | 24 or more | M12 or thicker |

Table 2. Screw locking torque

Unit : N-m

| Screw model | Locking torque | Screw model | Locking torque |
|-------------|----------------|-------------|----------------|
| M3 | 2.1 | M10 | 72 |
| M4 | 3.9 | M12 | 122 |
| M5 | 9 | M16 | 201 |
| M6 | 13 | M20 | 392 |
| M8 | 31 | M22 | 531 |

Installation steps

Please follow below steps when installing cross roller bearings:

1. Checking each part and component before installing


Clean the housing and other installation components, remove dirt and make sure there are no burrs.

2. Installing the cross roller bearings into housing or onto shaft

The cross roller bearing is easily tilted due to its thin wall structure. To install, level one side, and gradually insert the bearing by evenly and cautiously hammering along the perimeter using a rubber hammer or similar tool until the sound of the ring come in full contact with the mounting surface.

3. Installing the flange disc

- (1) Place the disc into position, shake it along its circumference back and forth several times to match the bolt holes.
- (2) Install screws. When manually turning the screws, make sure that the screw is fully aligned with the screw hole.
- (3) Tighten the screws in the order on the diagonal repeatedly as shown in the following figure, and fasten the disc from loose to tighten in three to four steps. When tightening the split type inner or outer rings, slightly turn the one-piece inner or outer rings to correct the misalignment between the ring and body.

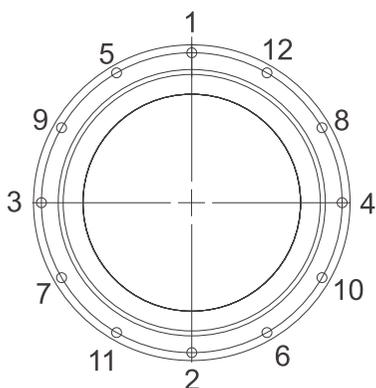

Other precautions

Instructions on lubrication

- (1) Each cross roller bearings are pre-lubricated with high quality lithium soap grease No. 2. However, the bearings need lubricating on a regular basis and users are required to reapply same type of grease at a minimum interval ranging from 6 to 12 months to enable the distribution of grease within the entire internal structure of the bearing; the actual interval depends on the machine or usage.
- (2) Avoid mixing various kinds of lubrication grease.
- (3) When the bearings are used under such special conditions as high vibration, clean rooms, vacuum, low and high temperature, it may be impossible to use general-purpose lubrication grease and please contact us before using special type grease.

Precautions on use

- (1) Foreign objects entering the interior of the bearings may damage the revolution path of the rollers or disable their functions; take caution to prevent foreign objects entering the bearing.
- (2) If bearings are used at an ambient temperature above 80°C, contact us first.
- (3) When foreign objects enter the interior of bearings, apply lube oil again after cleaning the product.
- (4) Do not attempt to remove the screws and nuts on the split type bearings.

Accuracy Standards

SRU、SRB、SRBE inner diameter dimensional accuracy

Unit : μm

| Inner ring diameter (d) Nominal dimension (mm) | | Tolerance dm | | | | | |
|---|-------|--------------|-------|-------|-------|---------|-------|
| | | 0、P5、P4、P2 | | PS5 | | PS4、PS2 | |
| Above | Below | Above | Below | Above | Below | Above | Below |
| - | 18 | 0 | -8 | - | - | - | - |
| 18 | 30 | 0 | -10 | 0 | -6 | 0 | -5 |
| 30 | 50 | 0 | -12 | 0 | -8 | 0 | -6 |
| 50 | 80 | 0 | -15 | 0 | -9 | 0 | -7 |
| 80 | 120 | 0 | -20 | 0 | -10 | 0 | -8 |
| 120 | 150 | 0 | -25 | 0 | -13 | 0 | -10 |
| 150 | 180 | 0 | -25 | 0 | -13 | 0 | -10 |
| 180 | 250 | 0 | -30 | 0 | -15 | 0 | -12 |
| 250 | 315 | 0 | -35 | 0 | -18 | - | - |

SRU、SRB、SRBE outer diameter dimensional accuracy

Unit : μm

| Outer ring diameter (D) Nominal dimension (mm) | | Tolerance dm | | | | | |
|---|-------|--------------|-------|-------|-------|---------|-------|
| | | 0、P5、P4、P2 | | PS5 | | PS4、PS2 | |
| Above | Below | Above | Below | Above | Below | Above | Below |
| 18 | 30 | 0 | -9 | - | - | - | - |
| 30 | 50 | 0 | -11 | 0 | -7 | 0 | -6 |
| 50 | 80 | 0 | -13 | 0 | -9 | 0 | -7 |
| 80 | 120 | 0 | -15 | 0 | -10 | 0 | -8 |
| 120 | 150 | 0 | -18 | 0 | -11 | 0 | -9 |
| 150 | 180 | 0 | -25 | 0 | -13 | 0 | -10 |
| 180 | 250 | 0 | -30 | 0 | -15 | 0 | -11 |
| 250 | 315 | 0 | -35 | 0 | -18 | 0 | -13 |

SRAU ID and OD dimensional accuracy

Unit : μm

| Nominal dimension (mm) | | SRAU Inner Ring | | SRAU Outer Ring | |
|------------------------|-----|-----------------|-------|-----------------|-------|
| | | Above | Below | Above | Below |
| - | 18 | 0 | -8 | - | - |
| 18 | 30 | 0 | -10 | 0 | -9 |
| 30 | 50 | 0 | -12 | 0 | -11 |
| 50 | 80 | 0 | -15 | 0 | -13 |
| 80 | 120 | 0 | -20 | 0 | -15 |
| 120 | 150 | 0 | -25 | 0 | -18 |
| 150 | 180 | 0 | -25 | 0 | -25 |
| 180 | 315 | 0 | -30 | 0 | -30 |

SRU inner ring rotational accuracy

Unit : μm

| Model | Inner ring radial/axial run-out tolerance | | | |
|--------|---|----|----|-----|
| | 0 | P5 | P4 | P2 |
| SRU22 | 13 | 4 | 3 | 2.5 |
| SRU27 | 13 | 4 | 3 | 2.5 |
| SRU42 | 13 | 4 | 3 | 2.5 |
| SRU66 | 15 | 5 | 4 | 2.5 |
| SRU85 | 20 | 5 | 4 | 2.5 |
| SRU124 | 25 | 5 | 4 | 2.5 |
| SRU148 | 25 | 6 | 5 | 2.5 |
| SRU178 | 30 | 6 | 5 | 2.5 |
| SRU228 | 50 | 8 | 6 | 5 |

SRU outer ring rotational accuracy

Unit : μm

| Model | Outer ring radial/axial run-out tolerance | | | |
|--------|---|----|----|----|
| | 0 | P5 | P4 | P2 |
| SRU22 | 25 | 8 | 5 | 4 |
| SRU27 | 25 | 8 | 5 | 4 |
| SRU42 | 25 | 8 | 5 | 4 |
| SRU66 | 25 | 10 | 6 | 5 |
| SRU85 | 35 | 10 | 6 | 5 |
| SRU124 | 40 | 12 | 8 | 5 |
| SRU148 | 45 | 15 | 10 | 7 |
| SRU178 | 50 | 15 | 10 | 7 |
| SRU228 | 50 | 18 | 11 | 7 |

SRB、SRBE inner ring rotational accuracy

Unit : μm

| Inner ring diameter (d) Nominal dimension (mm) | | Inner ring radial run-out tolerance | | | | Inner ring axial run-out tolerance | | | |
|---|-------|-------------------------------------|-----------|-----------|-----------|------------------------------------|-----------|-----------|-----------|
| Above | Below | 0 | PS5 P5 | PS4 P4 | PS2 P2 | 0 | PS5 P5 | PS4 P4 | PS2 P2 |
| 18 | 30 | 13 | 4 | 3 | 2.5 | 13 | 4 | 3 | 2.5 |
| 30 | 50 | 15 | 5 | 4 | 2.5 | 15 | 5 | 4 | 2.5 |
| 50 | 80 | 20 | 5 | 4 | 2.5 | 20 | 5 | 4 | 2.5 |
| 80 | 120 | 25 | 6 | 5 | 2.5 | 25 | 6 | 5 | 2.5 |
| 120 | 150 | 30 | 8 | 6 | 2.5 | 30 | 8 | 6 | 2.5 |
| 150 | 180 | 30 | 8 | 6 | 5 | 30 | 8 | 6 | 5 |
| 180 | 250 | 40 | 10 | 8 | 5 | 40 | 10 | 8 | 5 |
| 250 | 315 | 50 | 13 | 10 | 7 | 50 | 13 | 10 | 7 |

SRBE outer ring rotational accuracy

Unit : μm

| Outer ring diameter (D) Nominal dimension (mm) | | Outer ring radial run-out tolerance | | | | Outer ring axial run-out tolerance | | | |
|---|-------|-------------------------------------|-----------|-----------|-----------|------------------------------------|-----------|-----------|-----------|
| Above | Below | 0 | PS5 P5 | PS4 P4 | PS2 P2 | 0 | PS5 P5 | PS4 P4 | PS2 P2 |
| 30 | 50 | 20 | 7 | 5 | 2.5 | 20 | 7 | 5 | 2.5 |
| 50 | 80 | 25 | 8 | 5 | 4 | 25 | 8 | 5 | 4 |
| 80 | 120 | 35 | 10 | 6 | 5 | 35 | 10 | 6 | 5 |
| 120 | 150 | 40 | 11 | 7 | 5 | 40 | 11 | 7 | 5 |
| 150 | 180 | 45 | 13 | 8 | 5 | 45 | 13 | 8 | 5 |
| 180 | 250 | 50 | 15 | 10 | 7 | 50 | 15 | 10 | 7 |
| 250 | 315 | 60 | 18 | 11 | 7 | 60 | 18 | 11 | 7 |

SRAU inner ring rotational accuracy

Unit : μm

| Inner ring diameter (d) Nominal dimension (mm) | | Inner ring radial run-out tolerance | | | | Inner ring axial run-out tolerance | | | |
|---|-------|-------------------------------------|----|----|----|------------------------------------|----|----|----|
| Above | Below | 0 | P6 | P5 | P4 | 0 | P6 | P5 | P4 |
| - | 18 | 10 | - | - | - | 10 | - | - | - |
| 18 | 40 | 13 | - | - | - | 13 | - | - | - |
| 40 | 65 | 13 | 10 | 5 | 4 | 13 | 10 | 5 | 4 |
| 65 | 80 | 15 | 10 | 5 | 4 | 15 | 10 | 5 | 4 |
| 80 | 100 | 15 | 13 | 6 | 5 | 15 | 13 | 6 | 5 |
| 100 | 120 | 20 | 13 | 6 | 5 | 20 | 13 | 6 | 5 |
| 120 | 140 | 25 | 18 | 8 | 6 | 25 | 18 | 8 | 6 |
| 140 | 180 | 25 | 18 | 8 | 6 | 25 | 18 | 8 | 6 |
| 180 | 200 | 30 | 20 | 10 | 8 | 30 | 20 | 10 | 8 |

*Above rotational accuracy are for width 8mm~13mm type ◦ If a certain level of accuracy is required, please contact with SFT ◦

*Note :SRAU width 5mm Type

1.Seals are not available

2.Only available with C1 radial clearance ,S1 is not available .

SRAU outer ring rotational accuracy

Unit : μm

| Outer ring diameter (d) Nominal dimension (mm) | | Outer ring radial run-out tolerance | | | | Outer ring axial run-out tolerance | | | |
|---|-------|-------------------------------------|----|----|----|------------------------------------|----|----|----|
| Above | Below | 0 | P6 | P5 | P4 | 0 | P6 | P5 | P4 |
| - | 65 | 13 | 11 | - | - | 13 | 11 | - | - |
| 65 | 80 | 13 | 11 | 8 | 5 | 13 | 11 | 8 | 5 |
| 80 | 100 | 15 | 13 | 10 | 6 | 15 | 13 | 10 | 6 |
| 100 | 120 | 15 | 13 | 10 | 6 | 15 | 13 | 10 | 6 |
| 120 | 140 | 20 | 15 | 11 | 7 | 20 | 15 | 11 | 7 |
| 140 | 180 | 25 | 20 | 11 | 7 | 25 | 20 | 11 | 7 |
| 180 | 200 | 25 | 20 | 15 | 10 | 25 | 20 | 15 | 10 |
| 200 | 250 | 30 | 25 | 15 | 10 | 30 | 25 | 15 | 10 |

*Above rotational accuracy are for width 8mm~13mm type ◦ If a certain level of accuracy is required, please contact with SFT ◦

*Note :SRAU width 5mm Type

1.Seals are not available

2.Only available with C1 radial clearance ,S1 is not available .

Inner & Outer ring width tolerances

SRU Inner & Outer ring width tolerances

Unit : μm

| Model | Tolerances | |
|--------|------------|-------|
| | Above | Below |
| SRU22 | 0 | -70 |
| SRU27 | 0 | -70 |
| SRU42 | 0 | -70 |
| SRU66 | 0 | -70 |
| SRU85 | 0 | -70 |
| SRU124 | 0 | -70 |
| SRU148 | 0 | -70 |
| SRU178 | 0 | -80 |
| SRU228 | 0 | -80 |

SRB Inner & Outer ring width tolerances (for all grades)

Unit : μm

| Inner ring diameter (d) Nominal dimension (mm) | | Tolerances | | Tolerances | |
|---|-------|------------|-------|------------|-------|
| | | Inner Ring | | Outer Ring | |
| Above | Below | Above | Below | Above | Below |
| 18 | 30 | 0 | -70 | 0 | -90 |
| 30 | 50 | 0 | -70 | 0 | -90 |
| 50 | 80 | 0 | -70 | 0 | -90 |
| 80 | 120 | 0 | -70 | 0 | -90 |
| 120 | 150 | 0 | -80 | 0 | -100 |
| 150 | 180 | 0 | -80 | 0 | -100 |
| 180 | 250 | 0 | -80 | 0 | -100 |
| 250 | 315 | 0 | -80 | 0 | -130 |

SRBE Inner & Outer ring width tolerances

Unit : μm

| Tolerances | |
|------------|---------|
| Maximum | Minimum |
| 0 | -75 |

SRAU Inner & Outer ring width tolerances

Unit : μm

| Tolerances | |
|------------|---------|
| Maximum | Minimum |
| 0 | -120 |

SRAUF Mounting Hole Type Super Slim Cross Roller Bearing

SRAUF ID & OD dimensional accuracy

Unit : μm

| Inner ring diameter (d) Nominal dimension (mm) | | Inner Ring | | Outer Ring | |
|---|-------|------------|-------|------------|-------|
| Above | Below | Above | Below | Above | Below |
| 10 | 20 | 0 | -8 | 0 | -9 |
| 20 | 30 | 0 | -8 | 0 | -9 |
| 30 | 40 | 0 | -10 | 0 | -13 |
| 40 | 50 | 0 | -10 | 0 | -13 |

SRAUF inner ring rotational accuracy

Unit : μm

| Inner ring diameter (d) Nominal dimension (mm) | | Inner ring radial run-out tolerance | | | | Inner ring axial run-out tolerance | | | |
|---|-------|-------------------------------------|----|----|----|------------------------------------|----|----|----|
| Above | Below | 0 | P6 | P5 | P4 | 0 | P6 | P5 | P4 |
| 10 | 20 | 13 | 8 | 4 | 3 | 13 | 8 | 4 | 3 |
| 20 | 30 | 13 | 8 | 5 | 4 | 13 | 8 | 5 | 4 |
| 30 | 40 | 13 | 10 | 5 | 4 | 13 | 10 | 5 | 4 |
| 40 | 50 | 15 | 10 | 5 | 4 | 15 | 10 | 5 | 4 |

SRAUF Outerr ring rotational accuracy

Unit : μm

| Outer ring diameter (d) Nominal dimension (mm) | | Outer ring radial run-out tolerance | | | | Outer ring axial run-out tolerance | | | |
|---|-------|-------------------------------------|----|----|----|------------------------------------|----|----|----|
| Above | Below | 0 | P6 | P5 | P4 | 0 | P6 | P5 | P4 |
| 40 | 50 | 20 | 10 | 7 | 5 | 20 | 10 | 7 | 5 |
| 50 | 60 | 20 | 13 | 8 | 5 | 20 | 13 | 8 | 5 |
| 60 | 70 | 25 | 13 | 8 | 5 | 25 | 13 | 8 | 5 |
| 70 | 80 | 25 | 13 | 8 | 5 | 25 | 13 | 8 | 5 |

SRAUF Inner & Outer ring width tolerances SRAUF radial clearance

Unit : μm

| Tolerances | |
|------------|---------|
| Maximum | Minimum |
| 0 | -75 |

| S1 Radial Clearance | | C1 Radial Clearance | |
|---------------------|---------|---------------------|---------|
| Minimum | Maximum | Minimum | Maximum |
| -8 | 0 | 0 | 15 |
| -8 | 0 | 0 | 15 |
| -8 | 0 | 0 | 15 |
| -8 | 0 | 0 | 15 |

Radial Clearances

SRU model radial clearance

Unit : μm

| Model | S1 Radial Clearance | | C1 Radial Clearance | |
|--------|------------------------|---------|------------------------|---------|
| | Minimum | Maximum | Minimum | Maximum |
| SRU22 | -8 | 0 | 0 | 20 |
| SRU27 | -8 | 0 | 0 | 20 |
| SRU42 | -10 | 0 | 0 | 20 |
| SRU66 | -10 | 0 | 0 | 25 |
| SRU85 | -10 | 0 | 0 | 30 |
| SRU124 | -15 | 0 | 0 | 35 |
| SRU148 | -15 | 0 | 0 | 35 |
| SRU178 | -15 | 0 | 0 | 50 |
| SRU228 | -15 | 0 | 0 | 50 |

SRB、SRBE model radial clearance

Unit : μm

| Roller Pitch Circle Diameter (dw) (mm) | | S1 Radial Clearance | | C1 Radial Clearance | |
|---|-------|---------------------|---------|---------------------|---------|
| Above | Below | Minimum | Maximum | Minimum | Maximum |
| 18 | 30 | -8 | 0 | 0 | 15 |
| 30 | 50 | -8 | 0 | 0 | 25 |
| 50 | 80 | -10 | 0 | 0 | 30 |
| 80 | 120 | -10 | 0 | 0 | 40 |
| 120 | 140 | -10 | 0 | 0 | 40 |
| 140 | 160 | -10 | 0 | 0 | 40 |
| 160 | 180 | -10 | 0 | 0 | 50 |
| 180 | 200 | -10 | 0 | 0 | 50 |
| 200 | 225 | -10 | 0 | 0 | 60 |
| 225 | 250 | -10 | 0 | 0 | 60 |
| 250 | 280 | -15 | 0 | 0 | 80 |
| 280 | 315 | -15 | 0 | 25 | 100 |

SRAU radial clearance

Unit : μm

| Roller Pitch Circle Diameter (dw) (mm) | | S1 Radial Clearance | | C1 Radial Clearance | |
|---|-------|---------------------|---------|---------------------|---------|
| Above | Below | Minimum | Maximum | Minimum | Maximum |
| - | 18 | - | - | 0 | 15 |
| 18 | 30 | - | - | 0 | 15 |
| 30 | 50 | - | - | 0 | 15 |
| 50 | 80 | -8 | 0 | 0 | 15 |
| 80 | 120 | -8 | 0 | 0 | 15 |
| 120 | 140 | -8 | 0 | 0 | 15 |
| 140 | 160 | -8 | 0 | 0 | 15 |
| 160 | 180 | -10 | 0 | 0 | 20 |
| 180 | 200 | -10 | 0 | 0 | 20 |
| 200 | 225 | -10 | 0 | 0 | 20 |


*Above radial clearance are for width 8mm~13mm type , If a certain level of accuracy is required, please contact with SFT ◦

*Note :SRAU width 5mm Type

1.Seals are not available


2.Only available with C1 radial clearance ,S1 is not available .

SRU (One piece inner & outer ring)

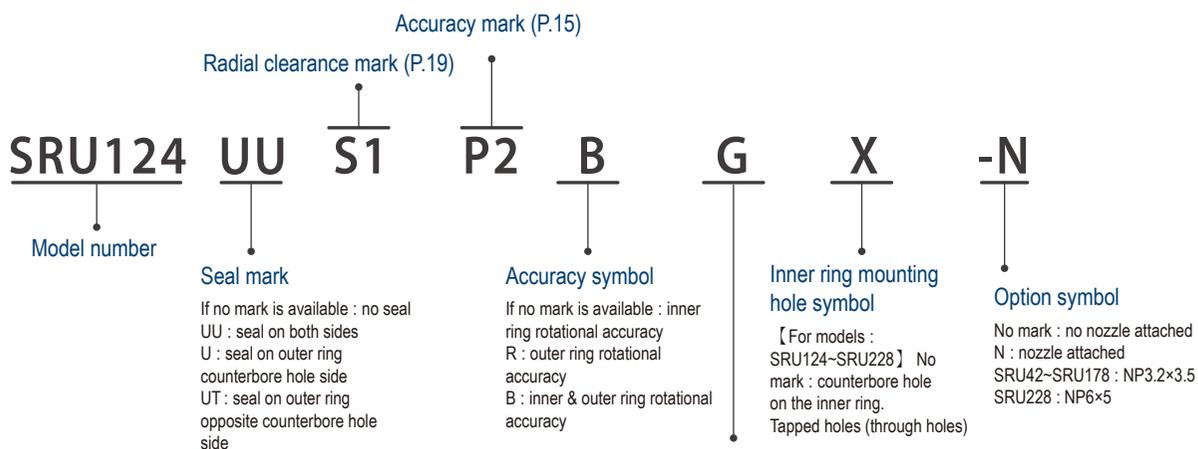












Mounting hole orientation

【For models : SRU124~SRU228 (except X models)】
No mark : the counterbore holes on inner and outer rings are in the same direction
G : The counterbore holes on inner and outer rings are in reverse direction

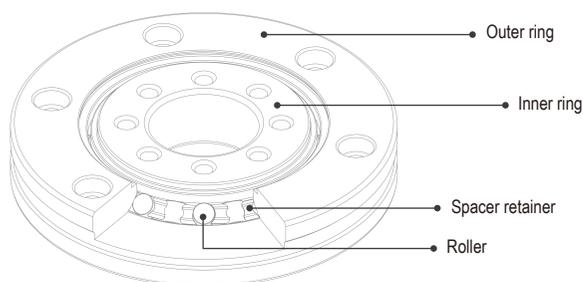

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | | Shoulder Height | | Basic Load Rating ^(Radial) | | Mass |
|----------------|----------------------|-------------------------|-------------------------|----------------|------------------------------------|--------------------------------|----------------------|----------------------|---------------------------------------|----------------------------|------|
| | | Inner Diameter d | Outer Diameter D | Width T | Greasing Hole d_l | Chamfer r_{min} | d_a | D_h | C kN | C₀ kN | kg |
| 10 | SRU22 | 10 | 34 | 8 | 1 | 0.3 | 18.4 | 25.2 | 1.35 | 1.46 | 0.05 |
| 10 | SRU27 | 10 | 52 | 8 | 1.5 | 0.5 | 22.4 | 31.6 | 3.49 | 3.33 | 0.12 |
| 20 | 2RU42 | 20 | 70 | 12 | 3 | 0.5 | 36 | 46 | 7.3 | 8.33 | 0.28 |
| 35 | SRU66 | 35 | 95 | 15 | 3 | 0.5 | 58 | 75 | 17.53 | 22.31 | 0.6 |
| 55 | SRU85 | 55 | 120 | 15 | 3 | 0.5 | 78 | 94 | 20.31 | 29.55 | 1.1 |
| 80 | SRU124(G) SRU124X | 80 | 165 | 22 | 3 | 1 | 115 | 133 | 33 | 50.85 | 2.61 |
| 90 | SRU148(G) SRU148X | 90 | 210 | 25 | 3 | 1.5 | 134 | 161 | 49 | 76.83 | 4.95 |
| 115 | SRU178(G) SRU178X | 115 | 240 | 28 | 3 | 1.5 | 162 | 194 | 80.32 | 134.9 | 6.78 |
| 160 | SRU228(G) SRU228X | 160 | 295 | 35 | 6.1 | 2 | 207 | 247 | 103.5 | 172.8 | 10.5 |

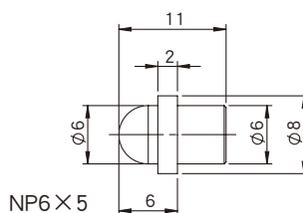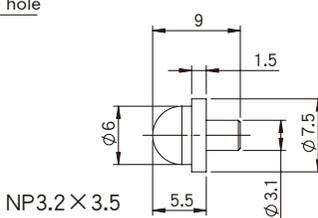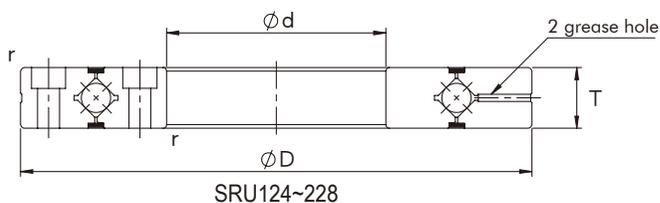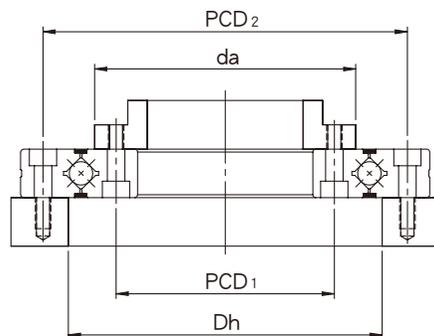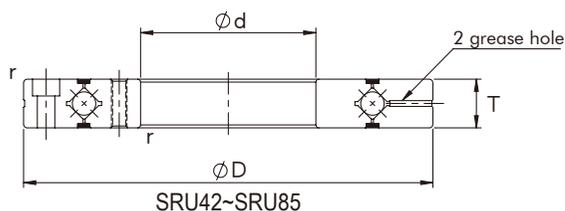

Mounting Hole Specification

| Inner Ring | | Outer Ring | |
|------------|--|------------|--|
| PCD1 | Mounting Hole | PCD2 | Mounting Hole |
| 15 | 4-M2.5 Through | 28.5 | 6-M2.5 Through |
| 16 | 4-M3 Through | 42 | 6- $\phi 3.4$ Through, $\phi 6.5$ hole depth 3.3 |
| 28 | 6-M3 Through | 57 | 6- $\phi 3.5$ Through, $\phi 6.5$ hole depth 3.5 |
| 45 | 8-M4 Through | 83 | 8- $\phi 4.5$ Through, $\phi 8$ hole depth 4.5 |
| 65 | 8-M5 Through | 105 | 8- $\phi 5.5$ Through, $\phi 10$ hole depth 5.5 |
| 97 | 10- $\phi 5.5$ Through, $\phi 10$ hole depth 5.5 10-M5 Through | 148 | 10- $\phi 5.5$ Through, $\phi 10$ hole depth 5.5 |
| 112 | 12- $\phi 9.0$ Through, $\phi 14$ hole depth 8.5 12-M8 Through | 187 | 12- $\phi 9.0$ Through, $\phi 14$ hole depth 8.5 |
| 139 | 12- $\phi 9.0$ Through, $\phi 14$ hole depth 8.5 12-M8 Through | 217 | 12- $\phi 9.0$ Through, $\phi 14$ hole depth 8.5 |
| 184 | 12- $\phi 11$ Through, $\phi 18$ hole depth 10.8 12-M10 Through | 270 | 12- $\phi 11$ Through, $\phi 18$ hole depth 10.8 |

SRB Model (Split Outer Ring model for inner ring rotation)

SRB20030

Model number

UU

Seal mark

If no mark is available: no seal
 UU : seal on both sides
 U : seal on either side

S1


Radial clearance mark (P.19)

S1 : Preloaded (negative clearance)
 C1 : No preload (positive clearance)

P2

Accuracy mark (P.15)


if no mark is available: ordinary grade (0 grade)
 P5 : rotating accuracy grade 5
 PS5 : rotating accuracy grade 5+size accuracy grade 5
 P4 : rotating accuracy grade 4
 PS4 : rotating accuracy grade 4 +size accuracy grade 4
 P2 : rotating accuracy grade 2
 PS2 : rotating accuracy grade 2 + size accuracy grad 2

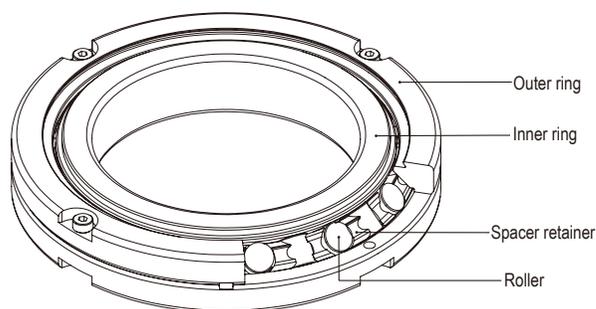

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | | | Shoulder Height | | Basic Load Rating (Radial) | | Mass |
|----------------|--------------|------------------|------------------|-------------------------|---------------|-----|--------------------------|-----------------|------|----------------------------|-------------------|------|
| | | Inner Diameter d | Outer Diameter D | Width T, T ₁ | Greasing Hole | | Chamfer r _{min} | da | Dh | C kN | C ₀ kN | kg |
| | | | | | w | h | | | | | | |
| 20 | SRB2008 | 20 | 36 | 8 | 2.1 | 0.7 | 0.5 | 24 | 30 | 3.2 | 3.1 | 0.06 |
| 25 | SRB2508 | 25 | 41 | 8 | 2.1 | 0.7 | 0.5 | 29 | 35 | 3.6 | 3.8 | 0.07 |
| 30 | SRB3010 | 30 | 55 | 10 | 2.6 | 0.8 | 0.6 | 37.5 | 46.5 | 7.4 | 8.4 | 0.12 |
| 35 | SRB3510 | 35 | 60 | 10 | 2.6 | 0.8 | 0.6 | 41.5 | 51 | 7.6 | 9.1 | 0.14 |
| 40 | SRB4010 | 40 | 65 | 10 | 2.6 | 0.8 | 0.6 | 47 | 58 | 8.3 | 10.8 | 0.15 |
| 45 | SRB4510 | 45 | 70 | 10 | 2.6 | 0.8 | 0.6 | 51.5 | 61 | 8.6 | 11.1 | 0.18 |
| 50 | SRB5013 | 50 | 80 | 13 | 2.6 | 1.5 | 0.6 | 57 | 72.5 | 16.6 | 20.7 | 0.28 |
| 60 | SRB6013 | 60 | 90 | 13 | 2.6 | 1.5 | 0.6 | 67.5 | 82.5 | 18 | 24.1 | 0.32 |
| 70 | SRB7013 | 70 | 100 | 13 | 2.6 | 1.5 | 0.6 | 78.5 | 91.5 | 19.5 | 27.9 | 0.37 |
| 80 | SRB8016 | 80 | 120 | 16 | 3.1 | 1.5 | 0.8 | 91.5 | 110 | 30 | 42 | 0.72 |
| 90 | SRB9016 | 90 | 130 | 16 | 3.1 | 1.5 | 1.0 | 98.8 | 117 | 31.3 | 45.1 | 0.77 |
| 100 | SRB10016 | 100 | 140 | 16 | 3.6 | 1.5 | 1.0 | 110 | 128 | 31.8 | 48.8 | 0.82 |
| 100 | SRB10020 | 100 | 150 | 20 | 3.6 | 1.5 | 1.0 | 117 | 132 | 33 | 51 | 1.47 |
| 110 | SRB11012 | 110 | 135 | 12 | 2.6 | 0.8 | 0.6 | 118 | 126 | 12.6 | 24 | 0.42 |
| 110 | SRB11015 | 110 | 145 | 15 | 3.6 | 1.5 | 0.6 | 123 | 135 | 23.8 | 41.8 | 0.76 |
| 110 | SRB11020 | 110 | 160 | 20 | 3.6 | 1.5 | 1.0 | 121 | 139 | 34 | 54 | 1.58 |
| 120 | SRB12016 | 120 | 150 | 16 | 3.6 | 1.5 | 0.8 | 128 | 140 | 24.3 | 43.4 | 0.74 |
| 120 | SRB12025 | 120 | 180 | 25 | 3.6 | 2.1 | 1.5 | 134 | 163 | 66.8 | 100.2 | 2.62 |

Note) (w) and (h) greasing hole dimensions in the detailed view are reference values.

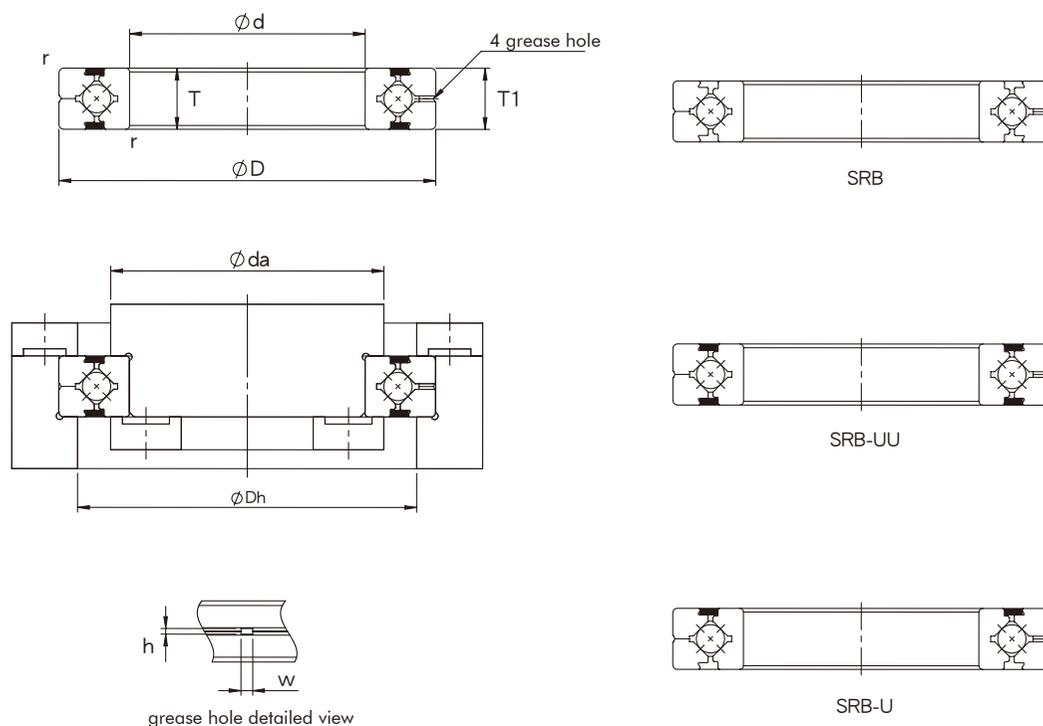

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | | | Shoulder Height | | Basic Load Rating ^(Radial) | | Mass |
|----------------|--------------|-----------------------|-----------------------|-------------------|---------------|-----|----------------------|-----------------|------|---------------------------------------|-------------|------|
| | | Inner Diameter d | Outer Diameter D | Width T, T_1 | Greasing Hole | | Chamfer r_{min} | da | Dh | C kN | C_0 kN | kg |
| | | | | | w | h | | | | | | |
| 130 | SRB13015 | 130 | 160 | 15 | 3.6 | 1.5 | 0.8 | 136 | 151 | 25 | 46.9 | 0.74 |
| 130 | SRB13025 | 130 | 190 | 25 | 3.6 | 2.1 | 1.2 | 144 | 173 | 69.7 | 107.3 | 2.8 |
| 140 | SRB14016 | 140 | 175 | 16 | 2.6 | 1.5 | 0.8 | 148 | 163 | 26 | 50.3 | 1.1 |
| 140 | SRB14025 | 140 | 200 | 25 | 3.6 | 2.1 | 1.2 | 155 | 184 | 74.7 | 121 | 2.98 |
| 150 | SRB15013 | 150 | 180 | 13 | 2.6 | 1.5 | 0.5 | 158 | 171 | 27.1 | 53.7 | 0.66 |
| 150 | SRB15025 | 150 | 210 | 25 | 3.6 | 2.1 | 1.2 | 165 | 193 | 76.5 | 128 | 3.18 |
| 150 | SRB15030 | 150 | 230 | 30 | 4.6 | 3.1 | 1.5 | 174 | 210 | 100 | 156 | 5.2 |
| 160 | SRB16025 | 160 | 220 | 25 | 3.6 | 2.1 | 1.2 | 172 | 205 | 81.6 | 135 | 3.12 |
| 170 | SRB17020 | 170 | 220 | 20 | 3.6 | 1.5 | 1.2 | 185 | 197 | 29.2 | 62 | 2.2 |
| 180 | SRB18025 | 180 | 240 | 25 | 3.6 | 1.8 | 1.2 | 196 | 224 | 84.3 | 143 | 3.41 |
| 190 | SRB19025 | 190 | 240 | 25 | 3.6 | 1.5 | 0.8 | 203 | 221 | 41.8 | 82.7 | 2.97 |
| 200 | SRB20025 | 200 | 260 | 25 | 3.6 | 1.8 | 1.8 | 214 | 246 | 84.1 | 157 | 4.2 |
| 200 | SRB20030 | 200 | 280 | 30 | 4.6 | 2.8 | 1.8 | 222 | 257 | 113 | 202 | 6.8 |
| 200 | SRB20035 | 200 | 295 | 35 | 5.1 | 2.8 | 1.8 | 224 | 271 | 151 | 251 | 9.8 |
| 220 | SRB22025 | 220 | 280 | 25 | 3.6 | 1.8 | 1.8 | 236 | 264 | 92.1 | 173 | 4 |
| 240 | SRB24025 | 240 | 300 | 25 | 3.6 | 1.8 | 2.2 | 255 | 282 | 68.4 | 146 | 4.7 |
| 250 | SRB25025 | 250 | 310 | 25 | 3.6 | 1.8 | 2.2 | 264 | 291 | 69.2 | 152 | 5.2 |

Note) (w) and (h) greasing hole dimensions in the detailed view are reference values.

SRBE Model (One piece inner & outer ring)

SRBE20030

Model number

UU

Seal mark

If no mark is available : no seal
 UU : seal on both sides
 U : seal on either side

S1


Radial clearance mark (P.19)

S1 : Preloaded (negative clearance)
 C1 : No preload (positive clearance)

P2


Accuracy mark (P.15)

if no mark is available : ordinary grade (0 grade)
 P5 : rotating accuracy grade 5
 PS5 : rotating accuracy grade 5+size accuracy grade 5
 P4 : rotating accuracy grade 4
 PS4 : rotating accuracy grade 4 +size accuracy grade 4
 P2 : rotating accuracy grade 2
 PS2 : rotating accuracy grade 2 + size accuracy grade 2

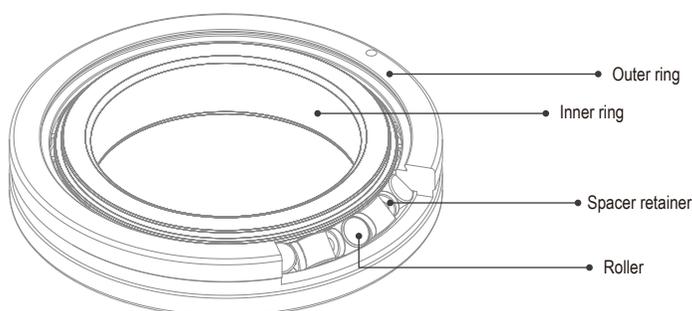

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | | Shoulder Height | | Basic Load Rating ^(Radial) | | Mass |
|----------------|--------------|---------------------|---------------------|----------------------------|---------------|-----------------------------|-----------------|-------|---------------------------------------|----------------------|------|
| | | Inner Diameter d | Outer Diameter D | Width T, T ₁ | Greasing Hole | Chamfer r _{min} | da | Dh | C kN | C ₀ kN | kg |
| 20 | SRBE2008 | 20 | 36 | 8 | 2-Φ2 | 0.5 | 24 | 30 | 3.2 | 3.1 | 0.06 |
| 25 | SRBE2508 | 25 | 41 | 8 | 2-Φ2 | 0.5 | 29 | 35 | 3.6 | 3.8 | 0.07 |
| 30 | SRBE3010 | 30 | 55 | 10 | 2-Φ2 | 0.6 | 37.5 | 46.5 | 7.4 | 8.4 | 0.12 |
| 35 | SRBE3510 | 35 | 60 | 10 | 2-Φ2 | 0.6 | 41.5 | 51 | 7.6 | 9.1 | 0.14 |
| 40 | SRBE4010 | 40 | 65 | 10 | 2-Φ2 | 0.6 | 47 | 58 | 8.3 | 10.8 | 0.15 |
| 45 | SRBE4510 | 45 | 70 | 10 | 2-Φ2 | 0.6 | 51.5 | 61 | 8.6 | 11.1 | 0.18 |
| 50 | SRBE5013 | 50 | 80 | 13 | 2-Φ3 | 0.6 | 57 | 72.5 | 16.6 | 20.7 | 0.28 |
| 60 | SRBE6013 | 60 | 90 | 13 | 2-Φ3 | 0.6 | 67.5 | 82.5 | 18 | 24.1 | 0.32 |
| 70 | SRBE7013 | 70 | 100 | 13 | 2-Φ3 | 0.6 | 78.5 | 91.5 | 19.5 | 27.9 | 0.37 |
| 80 | SRBE8013 | 80 | 110 | 13 | 2-Φ2 | 0.8 | 87.5 | 101.5 | 20.8 | 31.1 | 0.40 |
| 80 | SRBE8016 | 80 | 120 | 16 | 2-Φ3 | 0.8 | 91.5 | 110 | 30 | 42 | 0.72 |
| 90 | SRBE9016 | 90 | 130 | 16 | 2-Φ3 | 1.0 | 98.8 | 117 | 31.3 | 45.1 | 0.77 |
| 100 | SRBE10016 | 100 | 140 | 16 | 2-Φ3 | 1.0 | 110 | 128 | 31.8 | 48.8 | 0.82 |
| 100 | SRBE10020 | 100 | 150 | 20 | 2-Φ3 | 1.0 | 117 | 132 | 33 | 51 | 1.47 |
| 110 | SRBE11012 | 110 | 135 | 12 | 2-Φ3 | 0.6 | 118 | 126 | 12.6 | 24 | 0.42 |
| 110 | SRBE11015 | 110 | 145 | 15 | 2-Φ3 | 0.6 | 123 | 135 | 23.8 | 41.8 | 0.76 |
| 110 | SRBE11020 | 110 | 160 | 20 | 2-Φ3 | 1.0 | 121 | 139 | 34 | 54 | 1.58 |
| 120 | SRBE12016 | 120 | 150 | 16 | 2-Φ3 | 0.8 | 128 | 140 | 24.3 | 43.4 | 0.74 |
| 120 | SRBE12025 | 120 | 180 | 25 | 2-Φ3 | 1.5 | 134 | 163 | 66.8 | 100.2 | 2.62 |

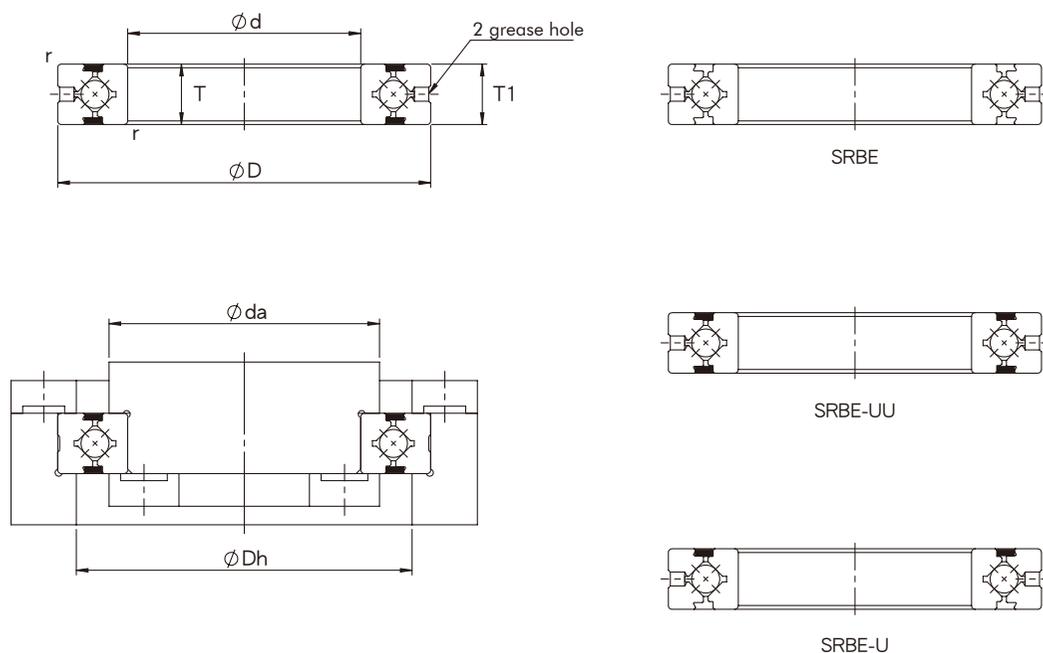

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | | Shoulder Height | | Basic Load Rating ^(Radial) | | Mass |
|----------------|--------------|-----------------------|-----------------------|-------------------|---------------|----------------------|-----------------|------|---------------------------------------|-------------|------|
| | | Inner Diameter d | Outer Diameter D | Width T, T_1 | Greasing Hole | Chamfer r_{min} | da | Dh | C kN | C_0 kN | kg |
| 130 | SRBE13015 | 130 | 160 | 15 | 2- $\phi 3$ | 0.8 | 136 | 151 | 25 | 46.9 | 0.74 |
| 130 | SRBE13025 | 130 | 190 | 25 | 2- $\phi 3$ | 1.2 | 144 | 173 | 69.7 | 107.3 | 2.8 |
| 140 | SRBE14016 | 140 | 175 | 16 | 2- $\phi 3$ | 0.8 | 148 | 163 | 26 | 50.3 | 1.1 |
| 140 | SRBE14025 | 140 | 200 | 25 | 2- $\phi 3$ | 1.2 | 155 | 184 | 74.7 | 121 | 2.98 |
| 150 | SRBE15013 | 150 | 180 | 13 | 2- $\phi 3$ | 0.5 | 158 | 171 | 27.1 | 53.7 | 0.66 |
| 150 | SRBE15025 | 150 | 210 | 25 | 2- $\phi 3$ | 1.2 | 165 | 193 | 76.5 | 128 | 3.18 |
| 150 | SRBE15030 | 150 | 230 | 30 | 2- $\phi 3$ | 1.5 | 174 | 210 | 100 | 156 | 5.2 |
| 160 | SRBE16025 | 160 | 220 | 25 | 2- $\phi 3$ | 1.2 | 172 | 205 | 81.6 | 135 | 3.12 |
| 170 | SRBE17020 | 170 | 220 | 20 | 2- $\phi 3$ | 1.2 | 185 | 197 | 29.2 | 62 | 2.2 |
| 180 | SRBE18025 | 180 | 240 | 25 | 2- $\phi 3$ | 1.2 | 196 | 224 | 84.3 | 143 | 3.41 |
| 190 | SRBE19025 | 190 | 240 | 25 | 2- $\phi 3$ | 0.8 | 203 | 221 | 41.8 | 82.7 | 2.97 |
| 200 | SRBE20025 | 200 | 260 | 25 | 2- $\phi 3$ | 1.8 | 214 | 246 | 84.1 | 157 | 4.2 |
| 200 | SRBE20030 | 200 | 280 | 30 | 2- $\phi 3$ | 1.8 | 222 | 257 | 113 | 202 | 6.8 |
| 200 | SRBE20035 | 200 | 295 | 35 | 2- $\phi 3$ | 1.8 | 224 | 271 | 151 | 251 | 9.8 |
| 220 | SRBE22025 | 220 | 280 | 25 | 2- $\phi 3$ | 1.8 | 236 | 264 | 92.1 | 173 | 4 |
| 240 | SRBE24025 | 240 | 300 | 25 | 2- $\phi 3$ | 2.2 | 255 | 282 | 68.4 | 146 | 4.7 |
| 250 | SRBE25025 | 250 | 310 | 25 | 2- $\phi 3$ | 2.2 | 264 | 291 | 69.2 | 152 | 5.2 |

SRAU Model (One piece inner & outer ring)

SRAU8008

Model number

UU

Seal mark

If no mark is available: no seal
 UU : seal on both sides
 U : seal on either side

S1

Radial clearance mark (P.19)

S1 : Preloaded (negative clearance)
 C1 : No preload (positive clearance)

P5

Accuracy mark (P.16)

if no mark is available: ordinary grade (0 grade)
 P6 : rotating accuracy grade 6
 P5 : rotating accuracy grade 5
 P4 : rotating accuracy grade 4

B

Accuracy symbol



If no mark is available: inner ring rotational accuracy
 R : outer ring rotational accuracy
 B : inner & outer ring rotational accuracy

*Note :SRAU width 5mm Type

1.Seals are not available


2.Only available with C1 radial clearance ,S1 is not available .

Width:5mm

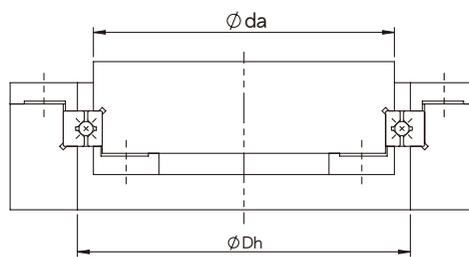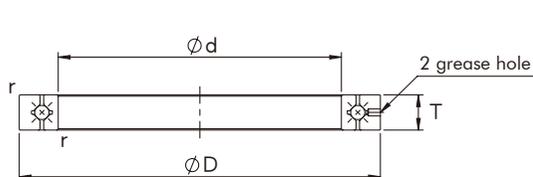

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | | | Shoulder Height | | Basic Load Rating (Radial) | | Mass |
|----------------|--------------|-----------------|------|--------------------------|---------|------------------------------|--------------------------|-----------------|------|----------------------------|-------------------|-------|
| | | ID d | OD D | Pitch Circle Diameter dw | Width T | Greasing Hole d _o | Chamfer r _{min} | da | Dh | C kN | C ₀ kN | kg |
| 10 | SRAU1005 | 10 | 21 | 14.7 | 5 | 1 | 0.15 | 12.5 | 17 | 1.12 | 0.809 | 0.009 |
| 20 | SRAU2005 | 20 | 31 | 24.7 | 5 | 1 | 0.15 | 22.5 | 27 | 1.49 | 1.4 | 0.015 |
| 30 | SRAU3005 | 30 | 41 | 34.7 | 5 | 1 | 0.15 | 32.5 | 37 | 1.89 | 2.14 | 0.021 |
| 40 | SRAU4005 | 40 | 51 | 44.7 | 5 | 1 | 0.15 | 42.5 | 47 | 2.14 | 2.74 | 0.027 |
| 45 | SRAU4505 | 45 | 56 | 49.7 | 5 | 1 | 0.15 | 46.5 | 52.5 | 2.29 | 3.12 | 0.029 |
| 50 | SRAU5005 | 50 | 61 | 54.7 | 5 | 1 | 0.15 | 52.5 | 57 | 2.43 | 3.49 | 0.032 |
| 60 | SRAU6005 | 60 | 71 | 64.7 | 5 | 1 | 0.15 | 62.5 | 67 | 2.63 | 4.09 | 0.038 |
| 70 | SRAU7005 | 70 | 81 | 74.7 | 5 | 1 | 0.15 | 72.5 | 77 | 2.81 | 4.68 | 0.044 |
| 80 | SRAU8005 | 80 | 91 | 84.7 | 5 | 1 | 0.15 | 82.5 | 87 | 3.05 | 5.43 | 0.5 |
| 90 | SRAU9005 | 90 | 101 | 94.7 | 5 | 1 | 0.15 | 92.5 | 97 | 3.19 | 6.03 | 0.056 |
| 100 | SRAU10005 | 100 | 111 | 104.7 | 5 | 1 | 0.15 | 102.5 | 107 | 3.37 | 6.63 | 0.061 |





SRAU



SRAU-UU

Width:8mm.13mm

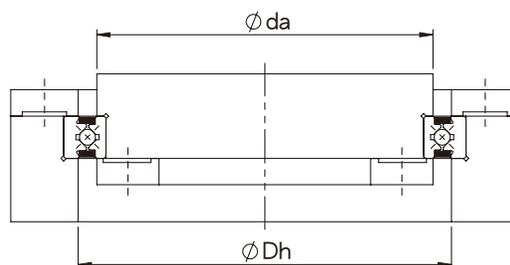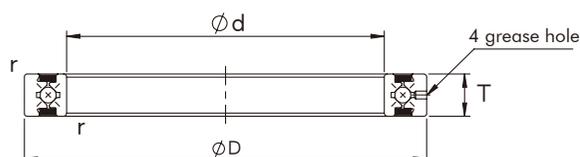

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | | | Shoulder Height | | Basic Load Rating ^(Radial) | | Mass |
|----------------|--------------|-----------------|------|--------------------------|---------|---------------------|-------------------|-----------------|-------|---------------------------------------|-------------------|------|
| | | ID d | OD D | Pitch Circle Diameter dw | Width T | Greasing Hole d_o | Chamfer r_{min} | da | Dh | C kN | C ₀ kN | kg |
| 50 | SRAU5008 | 50 | 66 | 57 | 8 | 1.5 | 0.5 | 53.5 | 60.5 | 5.1 | 7.19 | 0.08 |
| 60 | SRAU6008 | 60 | 76 | 67 | 8 | 1.5 | 0.5 | 63.5 | 70.5 | 5.68 | 8.68 | 0.09 |
| 70 | SRAU7008 | 70 | 86 | 77 | 8 | 1.5 | 0.5 | 73.5 | 80.5 | 5.98 | 9.8 | 0.1 |
| 80 | SRAU8008 | 80 | 96 | 87 | 8 | 1.5 | 0.5 | 83.5 | 90.5 | 6.37 | 11.3 | 0.11 |
| 90 | SRAU9008 | 90 | 106 | 97 | 8 | 1.5 | 0.5 | 93.5 | 100.5 | 6.76 | 12.4 | 0.12 |
| 100 | SRAU10008 | 100 | 116 | 107 | 8 | 1.5 | 0.5 | 103.5 | 110.5 | 7.15 | 13.9 | 0.14 |
| 110 | SRAU11008 | 110 | 126 | 117 | 8 | 1.5 | 0.5 | 113.5 | 120.5 | 7.45 | 15 | 0.15 |
| 120 | SRAU12008 | 120 | 136 | 127 | 8 | 1.5 | 0.5 | 123.5 | 130.5 | 7.84 | 16.5 | 0.17 |
| 130 | SRAU13008 | 130 | 146 | 137 | 8 | 1.5 | 0.5 | 133.5 | 140.5 | 7.94 | 17.6 | 0.18 |
| 140 | SRAU14008 | 140 | 156 | 147 | 8 | 1.5 | 0.5 | 143.5 | 150.5 | 8.33 | 19.1 | 0.19 |
| 150 | SRAU15008 | 150 | 166 | 157 | 8 | 1.5 | 0.5 | 153.5 | 160.5 | 8.82 | 20.6 | 0.2 |
| 160 | SRAU16013 | 160 | 186 | 172 | 13 | 2 | 0.8 | 165 | 179 | 23.3 | 44.9 | 0.59 |
| 170 | SRAU17013 | 170 | 196 | 182 | 13 | 2 | 0.8 | 175 | 189 | 23.5 | 46.5 | 0.64 |
| 180 | SRAU18013 | 180 | 206 | 191.5 | 13 | 2 | 0.8 | 185 | 199 | 24.5 | 49.8 | 0.68 |
| 190 | SRAU19013 | 190 | 216 | 201 | 13 | 2 | 0.8 | 195 | 209 | 24.9 | 51.5 | 0.69 |
| 200 | SRAU20013 | 200 | 226 | 211 | 13 | 2 | 0.8 | 205 | 219 | 25.8 | 54.5 | 0.71 |

SRAUF Model(One piece inner & outer ring)

SRAUF2005

S1

P5




Model number

Radial clearance mark (P.18)

Accuracy mark (P.18)

S1 : Preloaded (negative clearance)
C1 : No preload (positive clearance)

if no mark is available: ordinary grade (0 grade)
P6 : rotating accuracy grade 6
P5 : rotating accuracy grade 5
P4 : rotating accuracy grade 4

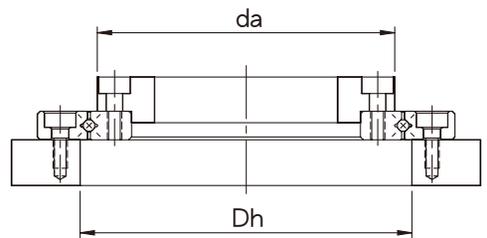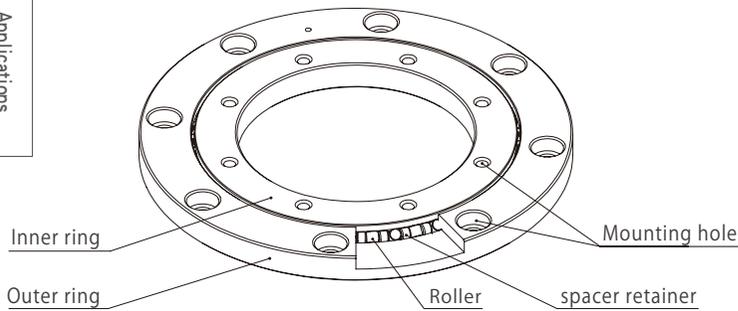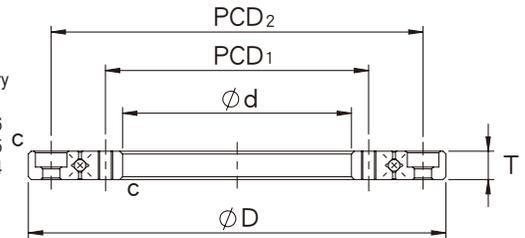

Unit : mm

| Shaft Diameter | Model Number | Main Dimensions | | | | Shoulder Height | | Basic Load Rating (Radial) | | Mass |
|----------------|--------------|------------------|------------------|---------|--------------------------|-----------------|------|----------------------------|-------------------|-------|
| | | Inner Diameter d | Outer Diameter D | Width T | Chamfer C _{min} | da | Dh | C kN | C ₀ kN | kg |
| 10 | SRAUF1005 | 10 | 43 | 5 | 0.15 | 21.5 | 28 | 1.50 | 1.41 | 0.046 |
| 20 | SRAUF2005 | 20 | 53 | 5 | 0.15 | 31.5 | 38 | 1.89 | 2.15 | 0.066 |
| 30 | SRAUF3005 | 30 | 63 | 5 | 0.15 | 41.5 | 47.5 | 2.14 | 2.75 | 0.083 |
| 40 | SRAUF4005 | 40 | 73 | 5 | 0.15 | 51.5 | 58 | 2.44 | 3.49 | 0.103 |


Mounting Hole Specification

| Inner Ring | | Outer Ring | |
|------------|----------------|------------|---|
| PCD1 | Mounting Hole | PCD2 | Mounting Hole |
| 10 | 6-M2.5 Through | 35 | 6-Ø2.9 through , Ø5.5 Counterbore depth 2.8 |
| 20 | 6-M2.5 Through | 45 | 6-Ø2.9 through , Ø5.5 Counterbore depth 2.8 |
| 30 | 8-M2.5 Through | 55 | 8-Ø2.9 through , Ø5.5 Counterbore depth 2.8 |
| 40 | 8-M2.5 Through | 65 | 8-Ø2.9 through , Ø5.5 Counterbore depth 2.8 |

SSHF Model (One piece inner & outer ring)

SSHF14

Model number

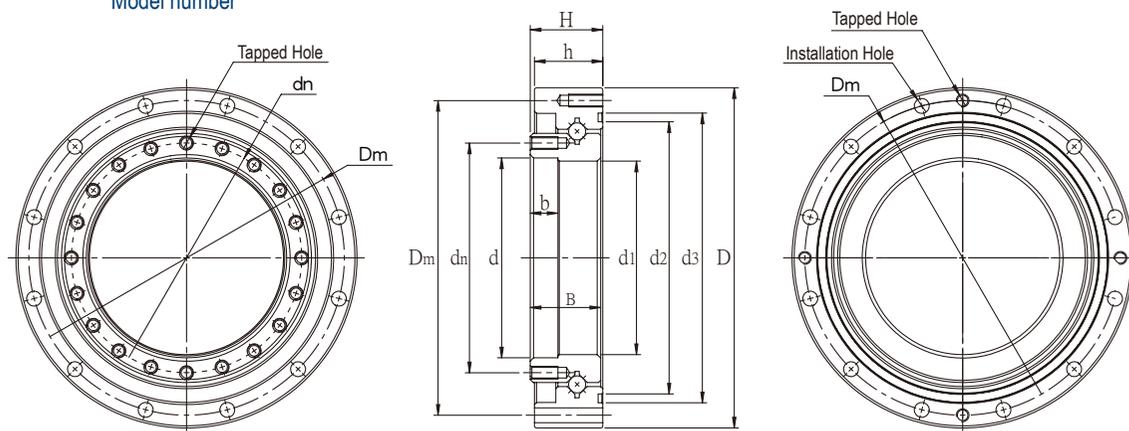

Unit : mm

| Model Number | Main Dimensions | | | | | | | | |
|--------------|-----------------|----|------|-------|------|------|------|------|-----|
| | D | d | d1 | d2 | d3 | H | h | B | b |
| SSHF14 | 70 | 38 | 36 | 53 | 57 | 15.1 | 14.1 | 14.7 | 5 |
| SSHF17 | 80 | 47 | 45.5 | 64 | 68.1 | 17 | 16 | 16.5 | 6.5 |
| SSHF20 | 90 | 54 | 51.3 | 72.6 | 78 | 18.5 | 17.5 | 17.5 | 7 |
| SSHF25 | 110 | 67 | 64.2 | 90 | 94.8 | 20.7 | 19.7 | 19.7 | 7.5 |
| SSHF32 | 142 | 88 | 84 | 117.5 | 123 | 24.4 | 23.4 | 22.9 | 8 |



Unit : mm

| Model Number | Installation Hole Dimension (PCD&PEC) | | | | | Basic Load Rating (Radial) | | Mass |
|--------------|---------------------------------------|-------------------|-------------|------------|---------------|----------------------------|----------|------|
| | Outer Ring | | | Inner Ring | | C kN | Co kN | kg |
| | Dm | Installation Hole | Tapped Hole | dn | Tapped Hole | | | |
| SSHF14 | 64 | 8-Φ3.5 | 2-M3 | 44 | 12-M3 | 10.34 | 13.82 | 0.1 |
| SSHF17 | 74 | 12-Φ3.5 | 4-M3 | 54 | 20-M3 | 10.07 | 14.12 | 0.34 |
| SSHF20 | 84 | 12-Φ3.5 | 4-M3 | 62 | 4-M3 16-M3 | 20.73 | 28.01 | 0.45 |
| SSHF25 | 102 | 12-Φ4.5 | 4-M3 | 77 | 4-M3 16-M4 | 23.22 | 34.64 | 0.7 |
| SSHF32 | 132 | 12-Φ5.5 | 4-M4 | 100 | 8-M4 16-M5 | 40.81 | 64.07 | 1.55 |

SCSG Model (Split outer ring)

SCSG14

Model number

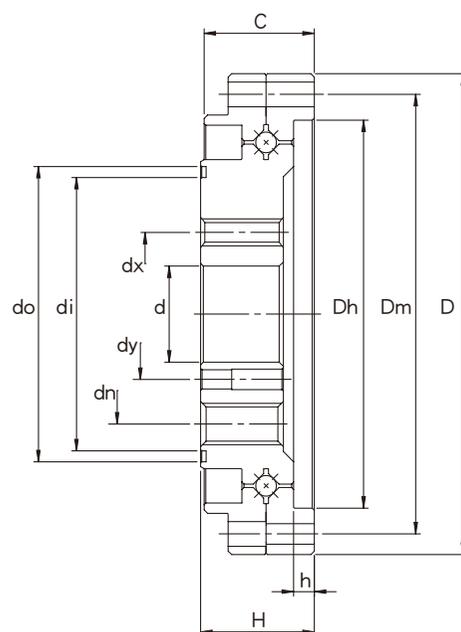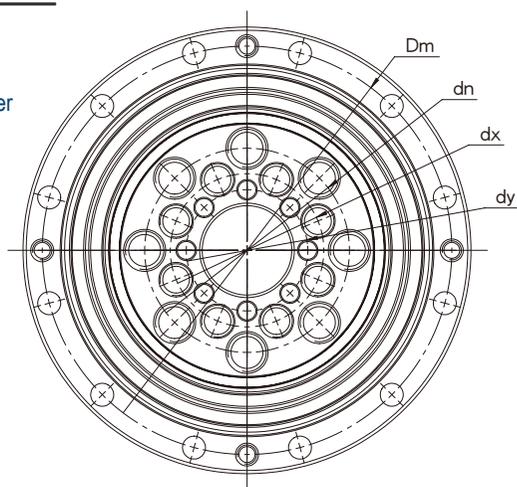

Unit : mm

| Model Number | Main Dimensions | | | | | | | | Basic Load Rating (Radial) | | Mass |
|--------------|-----------------|------|----|------|------|------|-----|------|----------------------------|----------|------|
| | D | Dh | d | do | di | H | h | C | C kN | Co kN | kg |
| SCSG14 | 55 | 41.8 | 11 | 29.7 | 28.3 | 16.5 | 2.5 | 16 | 4.88 | 5.68 | 0.13 |
| SCSG17 | 62 | 49 | 10 | 36 | 33.8 | 16.5 | 2.7 | 16 | 5.46 | 7.02 | 0.22 |
| SCSG20 | 70 | 56.5 | 14 | 43 | 39.8 | 16.5 | 3 | 16 | 6.67 | 9.66 | 0.2 |
| SCSG25 | 85 | 68 | 20 | 55.4 | 52.5 | 18.5 | 2 | 18 | 10.3 | 14.76 | 0.45 |
| SCSG32 | 112 | 90 | 26 | 74.1 | 68.4 | 22.5 | 3 | 21.5 | 22.6 | 32.97 | 0.88 |

Unit : mm

| Model Number | Installation Hole Size (PCD&PEC) | | | | | | | |
|--------------|----------------------------------|-------------------|------------|-------------|----|-------------|----|---------------|
| | Outer Ring | | Inner Ring | | | | | |
| | Dm | Installation Hole | dn | Tapped Hole | dx | Tapped Hole | dy | Hole Size |
| SCSG14 | 49 | 8- Φ 3.5 | 23 | 6-M4 | 17 | 6-M4 | 15 | 6- Φ 2.5 |
| SCSG17 | 56 | 10- Φ 3.5 | 27 | 6-M5 | 19 | 6-M5 | 15 | 6- Φ 3 |
| SCSG20 | 64 | 12- Φ 3.5 | 32 | 8-M6 | 24 | 8-M5 | 19 | 8- Φ 3 |
| SCSG25 | 79 | 16- Φ 3.5 | 42 | 8-M8 | 30 | 8-M6 | 26 | 8- Φ 3 |
| SCSG32 | 104 | 16- Φ 4.5 | 55 | 8-M10 | 40 | 8-M8 | 34 | 4- Φ 5 |

A decorative light blue swoosh that curves around the text, starting from the bottom left and ending at the top right.

02

Gonio Way

Gonio way

SFT Gonio Way is a non-circulating, curved cross roller slide way, and the precision rollers that have extremely low friction resistance provide a stable arc movement. They are mainly used in high-precision positioning where rotation centers remain unchanged and accurate tilting angles are required. They are widely used to meet the purposes of optical instruments and measuring devices.

Product features

- High rigidity and load capacity
- Same rotation centers
- Low friction and accurate movement
- Easy installation
- Low noise



Accuracy

SFT Gonio Way accuracy is measured by the method shown in the following figure which measures the mutual dimensional deviations of the four rails along their full length.


Accuracy measurement method

Unit : μm

| Model Number | Accuracy |
|--------------|----------|
| SRV0240-50 | 10 |
| SRV0260-60 | |
| SRV0370-90 | |
| SRV0370-110 | |
| SRV03100-160 | |

Unit : μm

| Model Number | Accuracy |
|----------------|----------|
| SCRV0240-51 | 10 |
| SCRV0240-70 | |
| SCRV0240-89.5 | |
| SCRV0260-65 | |
| SCRV0260-89 | |
| SCRV0260-113.5 | |
| SCRV0260-138.5 | |

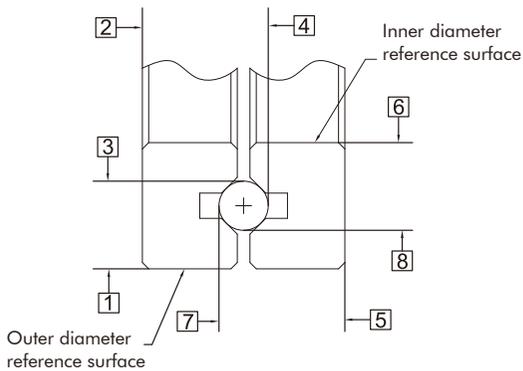

Rated life

The rated life of SFT Gonio Ways is calculated using the following formula.

L_f : Rated Life (10^6 cycle)

θ : Rotational angle (degree)

C : Basic dynamic load rating (N)

F : Applied load (N)

f_t : Temperature coefficient

f_L : Applied load coefficient


$$L_f = \frac{90}{\theta} \times \left(\frac{f_t}{f_L} \times \frac{C}{F} \right)^{\frac{10}{3}}$$

Life time

L_t : life time (hr)

r : number of rotation per minute (rpm)

$$L_t = \frac{L_f \times 10^6}{60 \times r}$$

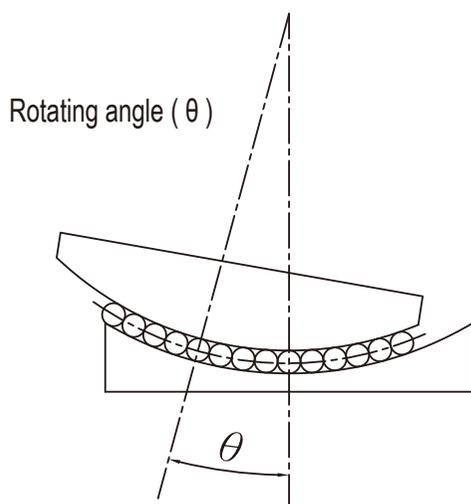


Usage precautions

- **Lubrication :**
Use lithium soap based lubricating grease.
- **Retainer Deviation :**
Retainers will deviate from their correct positions when SFT Gonio Way are used under conditions such as high-speed, vibrations and unbalanced loads. To minimize this deviation, maintain additional travel distance, avoid excessive pre-load and cycle the rails to return the cage to its central position.
- **Dust prevention :**
SFT Gonio ways may not realize their ideal performance due to dust or foreign objects likely to enter the interior depending on operating environment; it is recommended to protect SFT Gonio Way by using external dustproof covers if they are to be used in extreme environments.
- **End Pieces :**
End pieces are installed to the end the SFT Gonio Way to prevent the roller cage from falling off the track.
- **Working Environment :**
It is recommended to operate SFT Gonio ways with temperature range from -20°C to 110°C.
- **Paired Usage :**
SFT Gonio Way accuracy is based on a complete set in order to realize a precise control. Combining different Gonio ways sets will affect accuracy; please exercise caution when assembling SFT Gonio Ways.
- **Adjustments :**
Inaccurate installation on the mounting surface or improper preload adjustment will reduce motion accuracy; thus causing the rail to skew and reduce performance and service life; exercise extreme caution during adjustment.
- **Allowable Load :**
Allowable load is defined as a guaranteed smooth roller movement under which a small enough total elastic deformation of the rolling element and the raceway in the contact area that receives maximum-contact stress. Please use the product within the allowable load to ensure high accuracy and smooth-motion.

Gonio way structure

SRV models (figure 1.) of SFT Gonio Ways are made up of precisely ground V-shaped track and curved roller cages


figure 1

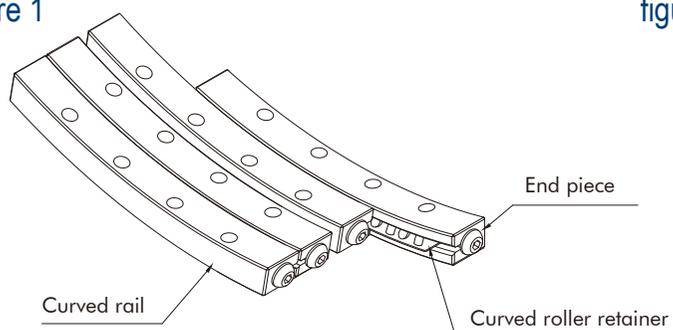

Installing gonio ways

Accuracy of the mounting surface
As shown in (figure 2), the accuracy of surfaces A-D will directly affect the motion accuracy.

figure 2

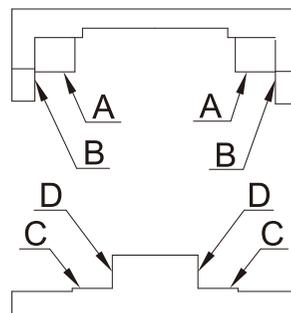

Installation sequence

1. Thoroughly clean the slideways and the mounting surface on the table to prevent the entry of foreign objects during installation.
2. Apply lube oil with low viscosity onto each mounting surface and lock gonio ways a, b, c and each surface using the suggested torque (figure 3-1).
3. Temporarily lock gonio way d (figure 3-2).
4. Remove the end pieces from one end and insert the curved roller cages to the central position of the gonio way; upon the completion, re-attach the end pieces to its original position. (figure 3-3).
5. Move the table horizontally to its maximum traveling end and adjust the curved roller cage to its central position.

Figure 3 Installation method

figure 3-1

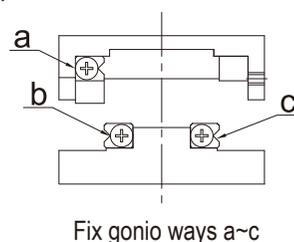


figure 3-2



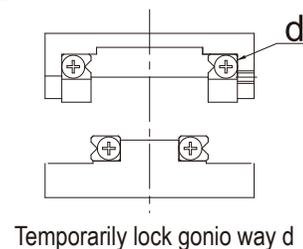


figure 3-3

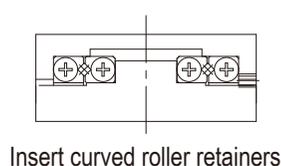

6. Install a dial gauge at the side of the slideway base level as reference. (figure 3-4).


figure 3-4

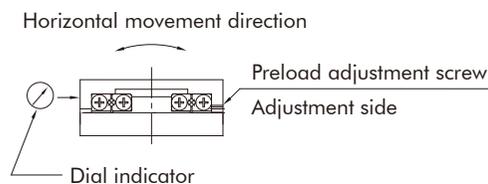

7. Move the slideway to one travel end and slightly lock adjustment screw above the curved roller cage. (figure 3-5).


figure 3-5

- : adjustment screw can be tightened.
- ×: adjustment screw may not be tightened.

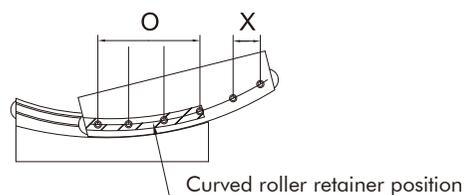


8. Move the sliding way fully to the other end and slightly lock adjustment screw. (figure 3-6).

figure 3-6

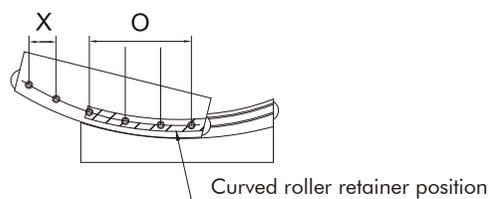

9. Move the slideway to the central position and slightly lock the adjustment screw at the central position (figure 3-7).

figure 3-7

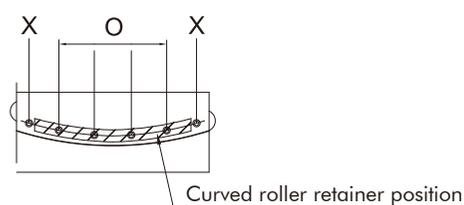

10. Repeat steps from (7) to (9) until there is no clearance with dial gauge showing minimum variation. Caution against applying excessive preloads


11. Once there is no clearance in the horizontal direction; carry out final preload calibration by repeating operations from (7) to (9) using the recommended torque force for locking screws.

12. Tighten the gonio way d (figure 3-2) by tightening the mounting screws sequentially in the same way as the adjustment screws.

SRV Model

SRV 03 70 - 110 - 10G

Model number Roller diameter Rail length Radius from rotation center Number of rollers

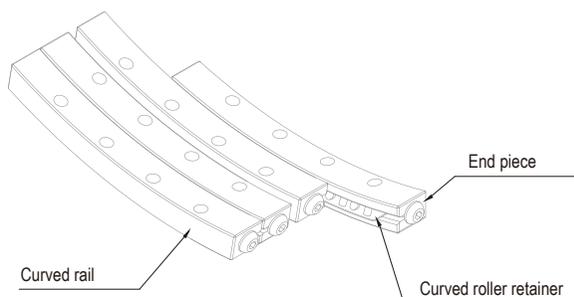

◆ One set contains 4 rails, 2 curved roller retainers and 8 end pieces.


unit: mm

| Model Number | Rotation range | Roller diameter (D) | Roller quantity (G) | Main dimensions | | | | | | |
|------------------|----------------|---------------------|---------------------|-----------------|-----|-----|-----|----|---|------|
| | | | | L | R | R1 | R2 | A | B | C |
| SRV0240-50-7G | ±10° | 2 | 7 | 40 | 50 | 53 | 47 | 15 | 6 | 7.25 |
| SRV0260-60-12G | ±10° | 2 | 12 | 60 | 60 | 63 | 57 | 15 | 6 | 7.25 |
| SRV0370-87-11G | ±10° | 3 | 11 | 70 | 87 | 91 | 83 | 18 | 8 | 8.5 |
| SRV0370-90-11G | ±10° | 3 | 11 | 70 | 90 | 94 | 86 | 18 | 8 | 8.5 |
| SRV0370-110-10G | ±10° | 3 | 10 | 70 | 110 | 114 | 106 | 18 | 8 | 8.5 |
| SRV0370-122-10G | ±10° | 3 | 10 | 70 | 122 | 126 | 118 | 18 | 8 | 8.5 |
| SRV0370-136-10G | ±10° | 3 | 10 | 70 | 136 | 140 | 132 | 18 | 8 | 8.5 |
| SRV03100-160-14G | ±10° | 3 | 14 | 100 | 160 | 164 | 156 | 18 | 8 | 8.5 |

unit: mm

| Model Number | Weight per set (g) | Allowable load (F)(N) | Basic load rating | | θ° | T | S | Y | K | MxP |
|------------------|--------------------|-----------------------|-----------------------------|----------------|-------|-----|----|-----|-------|--------|
| | | | Static (C ₀)(N) | Dynamic (C)(N) | | | | | | |
| SRV0240-50-7G | 47 | 480 | 1420 | 800 | 47.1° | 1.5 | M3 | 2.5 | 7.5 | 2x12.5 |
| SRV0260-60-12G | 78 | 930 | 2870 | 1430 | 59.9° | 1.5 | M3 | 2.5 | 11.25 | 3x12.5 |
| SRV0370-87-11G | 134 | 1820 | 5480 | 2620 | 47.4° | 1.9 | M3 | 3 | 12.5 | 3x15 |
| SRV0370-90-11G | 135 | 1820 | 5480 | 2620 | 45.7° | 1.9 | M3 | 3 | 12.5 | 3x15 |
| SRV0370-110-10G | 131 | 1800 | 5600 | 2420 | 37° | 1.9 | M3 | 3 | 12.5 | 3x15 |
| SRV0370-122-10G | 132 | 1800 | 5600 | 2420 | 33.3° | 1.9 | M3 | 3 | 12.5 | 3x15 |
| SRV0370-136-10G | 147 | 1800 | 5600 | 2420 | 29.8° | 1.9 | M3 | 3 | 12.5 | 3x15 |
| SRV03100-160-14G | 191 | 2600 | 7870 | 2480 | 36.3° | 1.9 | M3 | 3 | 12.5 | 5x15 |

SCRV Model

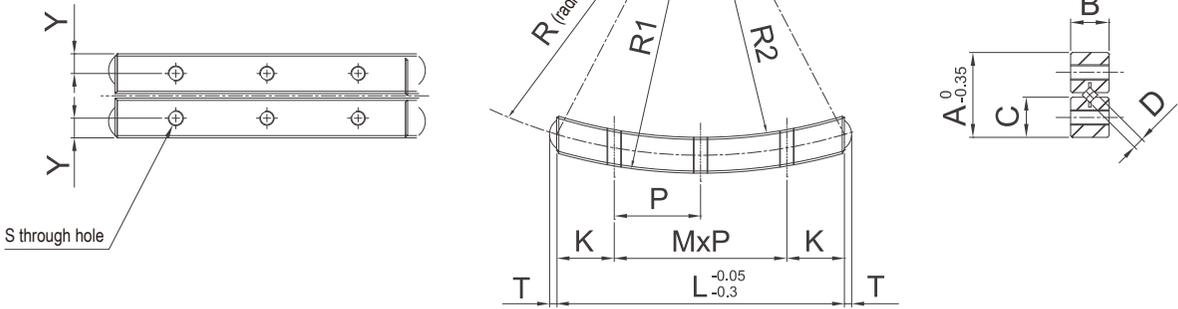

unit: mm

| Model Number | Rotation range | Roller diameter (D) | Roller quantity (G) | Main dimensions | | | | | | |
|--------------------|----------------|---------------------|---------------------|-----------------|-------|-------|-------|------|---|------|
| | | | | L | R | R1 | R2 | A | B | C |
| SCRV0240-51-7G | ±8° | 2 | 7 | 40 | 51 | 53.5 | 48.5 | 11.3 | 5 | 5.25 |
| SCRV0240-70-7G | ±6° | 2 | 7 | 40 | 70 | 72.5 | 67.5 | 11.3 | 5 | 5.25 |
| SCRV0240-89.5-7G | ±5° | 2 | 7 | 40 | 89.5 | 92 | 87 | 11.3 | 5 | 5.25 |
| SCRV0260-65-11G | ±8° | 2 | 11 | 60 | 65 | 68 | 62 | 16 | 6 | 7.6 |
| SCRV0260-89-11G | ±8° | 2 | 11 | 60 | 89 | 92 | 86 | 16 | 6 | 7.6 |
| SCRV0260-113.5-11G | ±6° | 2 | 11 | 60 | 113.5 | 116.5 | 110.5 | 16 | 6 | 7.6 |
| SCRV0260-138.5-9G | ±5° | 2 | 9 | 60 | 138.5 | 141.5 | 135.5 | 16 | 6 | 7.6 |

unit: mm

| Model Number | Weight per set (g) | Allowable load (F)(N) | Basic load rating | | θ° | T | S | Y | K | MxP |
|--------------------|--------------------|-----------------------|-----------------------------|----------------|-------|-----|----|-----|-------|--------|
| | | | Static (C ₀)(N) | Dynamic (C)(N) | | | | | | |
| SCRV0240-51-7G | 29 | 480 | 1420 | 800 | 46.2° | 1.5 | M2 | 2.0 | 8 | 2x12 |
| SCRV0240-70-7G | 29 | 480 | 1420 | 800 | 33.2° | 1.5 | M2 | 2.0 | 8 | 2x12 |
| SCRV0240-89.5-7G | 29 | 480 | 1420 | 800 | 25.8° | 1.5 | M2 | 2.0 | 8 | 2x12 |
| SCRV0260-65-11G | 79 | 853 | 2629 | 1320 | 55° | 1.5 | M3 | 2.5 | 11.25 | 3x12.5 |
| SCRV0260-89-11G | 77 | 853 | 2629 | 1320 | 39.4° | 1.5 | M3 | 2.5 | 11.25 | 3x12.5 |
| SCRV0260-113.5-11G | 77 | 853 | 2629 | 1320 | 30.7° | 1.5 | M3 | 2.5 | 11.25 | 3x12.5 |
| SCRV0260-138.5-9G | 77 | 853 | 2629 | 1320 | 25° | 1.5 | M3 | 2.5 | 11.25 | 3x12.5 |



03

Applications

Application examples

Cross roller bearings



Gonio ways



Strain wave gear cross roller bearings

