

CATALOG 2025

SCHOCK
TELESCOPIC SLIDES

Product-Highlights

Ball-bearing
telescopic slides

Production in Europe
Delivery from 1 piece
Short delivery routes
Patented ball mix
Individual colors

SCHOCK
TELESCOPIC SLIDES

**Material:**

Schock telescopic slides are manufactured from ZM100 coated steel hinges. Zinc-magnesium coated steel hinges have three times the corrosion protection of conventional galvanized steel hinges.

Pulverbeschichtung:

As a unique design element and additional corrosion protection, we offer our telescopic slides with a patented powder coating process in the color RAL 7016. The prices can be found in the following tables in the dulkel gray columns. Other RAL colors are available on request.

Partial extension:

A partial extension consists of two interlocking C-rails and has an extension travel of up to 70% of the slide length.

Full extension:

A full extension consists of three interlocking C-rails and has an extension travel of 100% of the slide length.

Over extension:

An over extension consists of three interlocking C-rails and has an extension travel of over 100% of the slide length.

Load capacity:

The specified load capacities always refer to a pair of telescopic rails (left, right). In the case of flat mounting (horizontally mounted), the load capacity is reduced by up to 75%.

Hold-in:

Fixes the slide with defined force in closed position.

Soft-close:

Automatically pulls the slide smoothly and quietly into the closed end position.

Push-to-open:

Opens the slide automatically with a light finger pressure.

Hold-out:

Fixes the slide with defined force in opened position.

Lock-out:

Locks the slide in opened position. The lock can be released by operating a latch.

Disconnect:

Enables the inner slide profile to be released by actuating a latch.

Extendable on both sides:

The telescopic slide can be extended on both sides and are limited by an end stop.

Air Motion®

Thanks to the patented Air Motion® technology, a mix of steel and plastic balls, our telescopic runners have particularly quiet and comfortable running properties.

Table of contents

Load capacity	Cross section (w/h)	Extraxt type/Series	Lenghts	Bracket	Air Motion®	Page
Up to 15 kg/Pair	10,0 x 17,0 mm	Partial extension 017	182 - 374 mm	-	-	04
Up to 20 kg/Pair	10,0 x 27,2 mm	Partial extension 010	250 - 500 mm	S. 20	yes	05
Up to 30 kg/Pair	20,0 x 27,2 mm	Full extension 040	200 - 500 mm	-	yes	06 - 07
Up to 50 kg/Pair	9,5 x 35,2 mm	Partial extension 016	305 - 711 mm	S. 20	yes	08
Up to 50 kg/Pair	13,0 x 37,5 mm	Partial extension 012	250 - 700 mm	S. 21	yes	09
Up to 50 kg/Pair	12,7 x 45,5 mm	Full extension 072	250 - 700 mm	S. 21	yes	10 - 11
Up to 75 kg/Pair	19,0 x 35,2 mm	Over extension 044	305 - 711 mm	S. 20	yes	12
Up to 75 kg/Pair	13,0 x 52,6 mm	Over extension 036	305 - 711 mm	S. 20	-	14 - 15
Up to 100 kg/Pair	16,0 x 57,5 mm	Over extension 037	300 - 750 mm	S. 20	yes	16 - 17
Up to 100 kg/Pair	17,5 x 57,4 mm	Over extension 038	300 - 700 mm	S. 20	yes	18 - 19
Up to 155 kg/Pair	19,0 x 57,4 mm	Full extension 039	305 - 711 mm	S. 20	yes	20 - 21
Up to 150 kg/Pair	34,0 x 57,4 mm	Full extension 048	800 - 1200 mm	-	-	22
Up to 160 kg/Pair	18,5 x 70,0 mm	Full extension 070	305 - 914 mm	S. 21	-	23
Up to 230 kg/Pair	19,1 x 76,0 mm	Full extension 076	254 - 1524 mm	-	-	24-25
Aluminum (AlMg4,5Mn)						
Up to 55 kg/Pair	17,5 x 57,4 mm	Over extension 038 AL	300 - 700 mm	-	yes	26 - 27
Stainless steel (1.4301)						
Up to 35 kg/Pair	20,0 x 27,2 mm	Over extension 040 VA	300 - 550 mm	-	-	28
Up to 140 kg/Pair	19,5 x 53,0 mm	Over extension 078 VA	300 - 800 mm	-	-	29
Mounting brackets						30 - 31
Pantry unit						
Up to 120 kg	70,0 x 95,0 mm	Pantry unit INBOX 600	476,0 mm		yes	32
Up to 35 kg	262,0 x 76,0 mm	Pantry unit INBOX 400	262,7 mm		yes	33
Up to 20 kg	125,0 x 37,0 mm	Pantry unit INBOX 200/210	285,0/332,0 mm		yes	34

Series 017

Load capacity up to 15 kg/pair

Partial extension, Cross section 10,0 x 17,0 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:


LA = Length

AZ = Travel parth

TK = Load capacity at
10.000 Cycles

 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

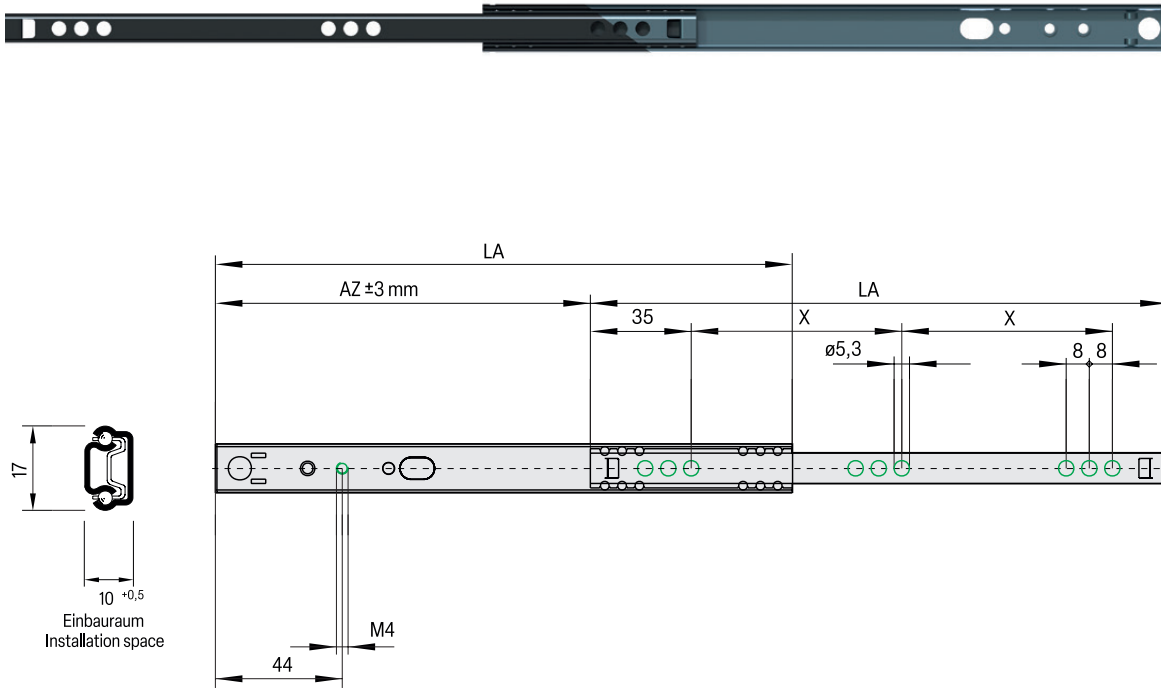

Function: Extendable on both sides

Article no.	Price	Article no.	Price	TK / kg	LA	AZ	Drawer depth	X	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	from - Up to mm	mm	kg/piece
20170182000	2,70	20170182005	6,46	15	182	124	184 - 286	64	0,07
20170214000	2,80	20170214005	6,56	15	214	138	216 - 342	80	0,08
20170246000	2,92	20170246005	6,68	15	246	170	248 - 396	96	0,09
20170310000	3,24	20170310005	7,00	15	310	216	312 - 506	128	0,12
20170374000	3,76	20170374005	7,52	15	374	262	376 - 615	160	0,14

Series 010

Load capacity up to 20 kg/pair

Partial extension, Cross section 10,0 x 27,2 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

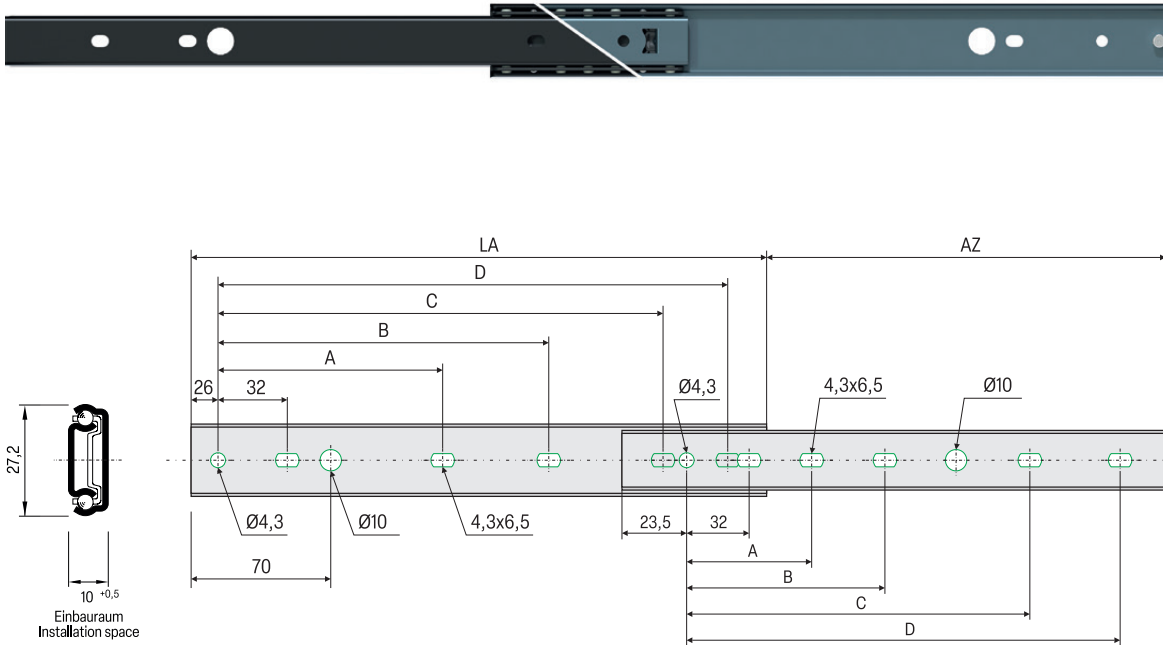

Attention:
Soft end stop - extension travel = + 10mm

Function: Hold-in, Hold-out, Air Motion®

Article no.	Price €/net	Article no.	Price €/net	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	Weight kg/piece
Model 1, ZM100		Model 2, RAL7016									
20100250280	12,10	20100250285	15,86	15	250	168	-	-	160	192	0,18
20100300280	12,76	20100300285	16,52	18	300	198	128	-	224	256	0,20
20100350280	13,51	20100350285	17,27	20	350	248	128	-	256	288	0,23
20100400280	13,88	20100400285	17,64	20	400	278	160	192	320	352	0,26
20100450280	14,66	20100450285	18,42	20	450	308	160	192	368	400	0,30
20100500280	15,31	20100500285	19,07	18	500	358	192	224	416	448	0,32

Series 040

Load capacity up to 30 kg/pair

Full extension, Cross section 20,0 x 27,2 mm

Material/ Refinement


Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel parth
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

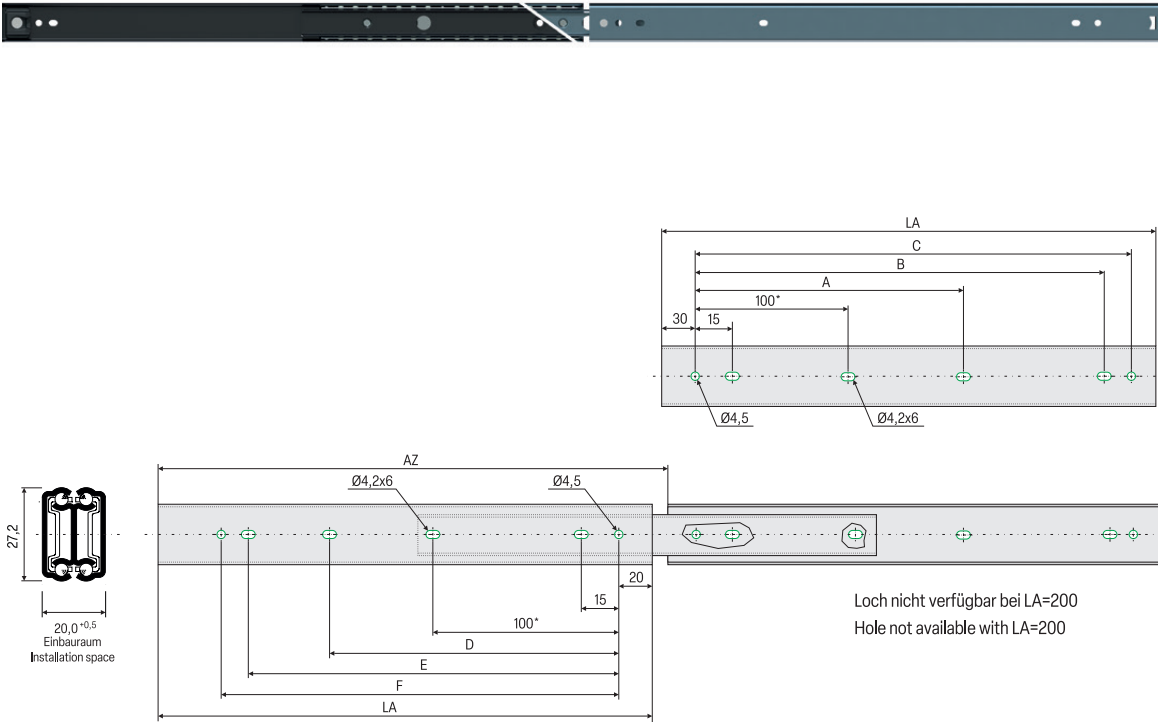

Function: Hold-in, Air Motion®

Article no.	Price €/net	Article no.	Price €/net	TK / kg 10.000	LA mm	AZ mm	A mm	C mm	D mm	E mm	F mm	G mm	Weight kg/piece
Model 1, ZM100		Model 2, RAL7016											
20400200250	13,97	20400200255	19,61	23	200	207	-	135	145	-	119	130	0,28
20400250250	14,53	20400250255	20,17	26	250	256	-	185	195	-	165	180	0,36
20400300250	15,57	20400300255	21,21	30	300	305	-	235	245	-	215	230	0,45
20400350250	16,14	20400350255	21,78	28	350	354	-	285	295	-	265	280	0,53
20400400250	16,93	20400400255	22,57	26	400	404	-	335	345	-	315	330	0,61
20400450250	19,44	20400450255	25,08	24	450	453	215	385	395	225	365	380	0,69
20400500250	20,61	20400500255	26,25	22	500	502	240	435	445	250	415	430	0,77

Series 040

Load capacity up to 30 kg/pair

Full extension, Cross section 20,0 x 27,2 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
● Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

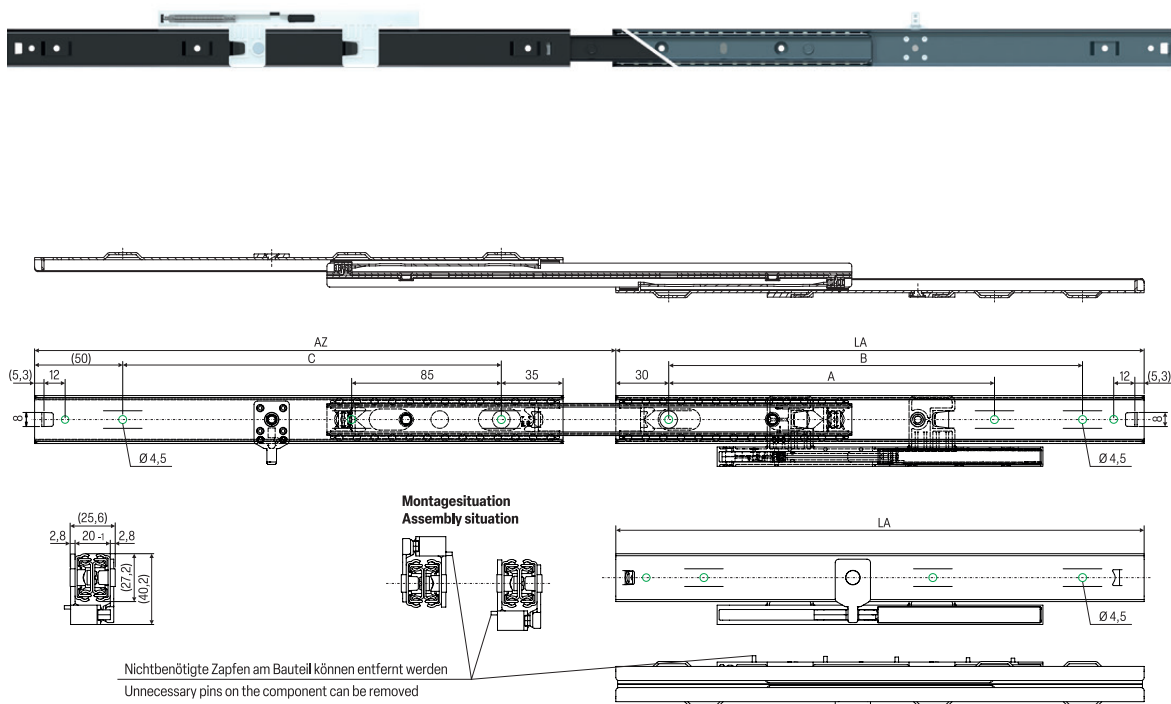

Function: Soft-close, Air Motion®

Article no.	Price	Article no.	Price	TK / kg	LA	AZ	A	B	C	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	kg/piece
20400300690	22,27	20400300695	27,91	30	300	330	185	235	215	0,45
20400350690	22,84	20400350695	28,48	28	350	380	210	285	265	0,53
20400400690	23,63	20400400695	29,27	26	400	430	235	335	315	0,61
20400450690	26,14	20400450695	31,78	24	450	470	260	385	365	0,69
20400500690	27,31	20400500695	32,95	22	500	530	285	435	415	0,77

Series 016

Load capacity up to 50 kg/pair

Partial extension, Cross section 9,5 x 35,2 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

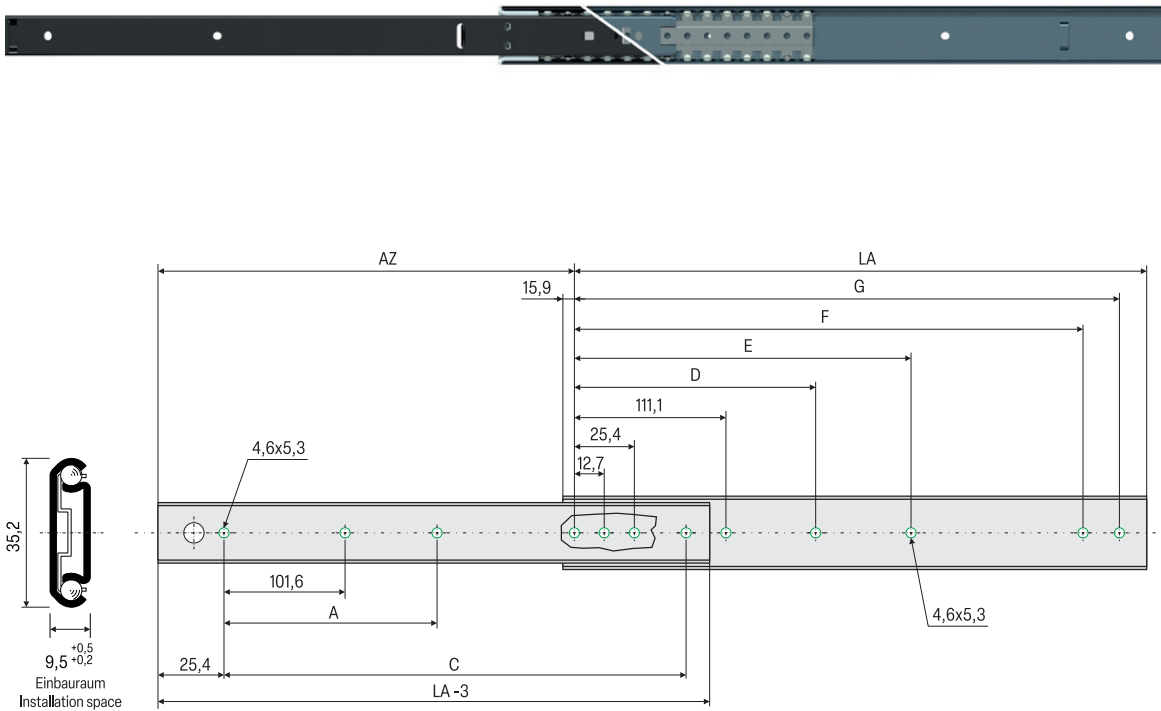

Function: Lock-out, Disconnect

Article no.	Price	Article no.	Price	TK / kg	LA	AZ	A	C	D	E	F	G	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20160305790	21,54	20160305795	25,30	50	305	196	-	254	-	149	260	273	0,32
20160356790	28,24	20160356795	32,00	50	356	247	-	305	-	200	311	324	0,37
20160406790	27,18	20160406795	30,94	45	406	247	-	356	-	251	362	375	0,42
20160457790	28,19	20160457795	31,95	45	457	328	203	406	213	302	413	425	0,47
20160508790	29,21	20160508795	32,79	40	508	379	229	457	238	352	464	476	0,49
20160559790	31,22	20160559795	34,98	40	559	405	254	508	264	403	514	527	0,54
20160610790	32,03	20160610795	35,79	35	610	429	279	559	289	454	565	578	0,59
20160660790	34,45	20160660795	38,21	30	660	481	305	610	314	505	616	629	0,63
20160711790	37,12	20160711795	40,88	30	711	506	330	660	340	556	667	679	0,72

Series 012

Load capacity up to 50 kg/pair

Partial extension, Cross section 13,0 x 37,5 mm

Material/ Refinement


Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test



Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

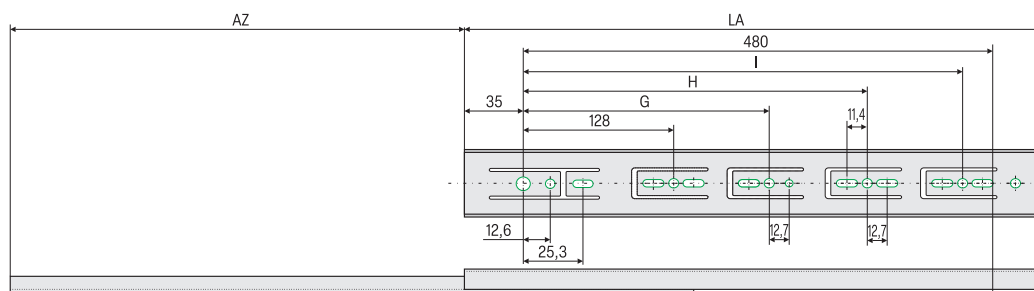

***) Lochbild bei 550 mm Länge
***) Hole pattern at 550 mm length

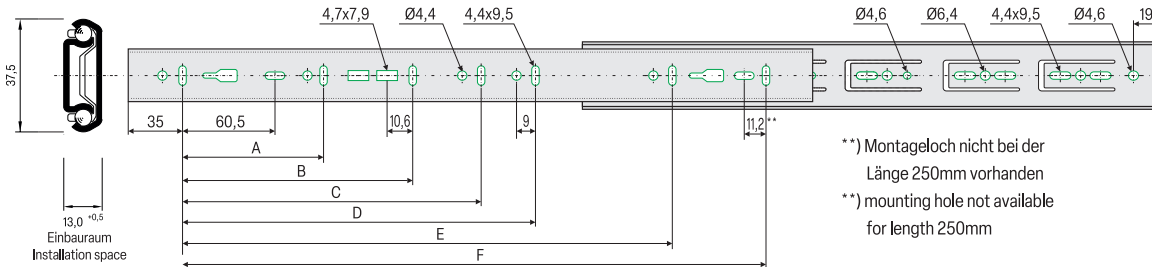

***) Montageloch nicht bei der
Länge 250mm vorhanden
**) mounting hole not available
for length 250mm

Function: Hold-in, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	I	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20120250250	9,39	20120250255	15,03	50	250	163	96	-	-	-	-	192	-	-	-	0,22
20120300250	9,58	20120300255	15,22	50	300	205	96	-	-	-	-	242	224	-	-	0,26
20120350250	9,77	20120350255	15,41	50	350	260	128	-	-	-	-	292	224	-	-	0,32
20120400250	9,95	20120400255	15,59	50	400	281	128	-	-	-	-	342	224	-	320	0,36
20120450250	10,17	20120450255	15,81	48	450	331	128	224	-	-	-	392	224	-	352	0,39
20120500250	10,71	20120500255	16,35	45	500	376	128	224	-	-	-	442	224	-	416	0,44
20120550250	11,06	20120550255	16,70	42	550	415	128	224	320	-	-	492	224	352	***	0,49
20120600250	11,46	20120600255	17,10	40	600	451	128	224	320	-	-	542	224	352	480	0,53
20120650250	11,80	20120650255	17,44	37	650	488	128	224	320	416	544	592	224	352	544	0,58
20120700250	12,40	20120700255	18,04	35	700	526	128	224	288	416	-	642	224	352	544	0,64

Series 072

Load capacity up to 50 kg/pair

Full extension, Cross section 12,7 x 45,5 mm

Material/ Refinement


Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

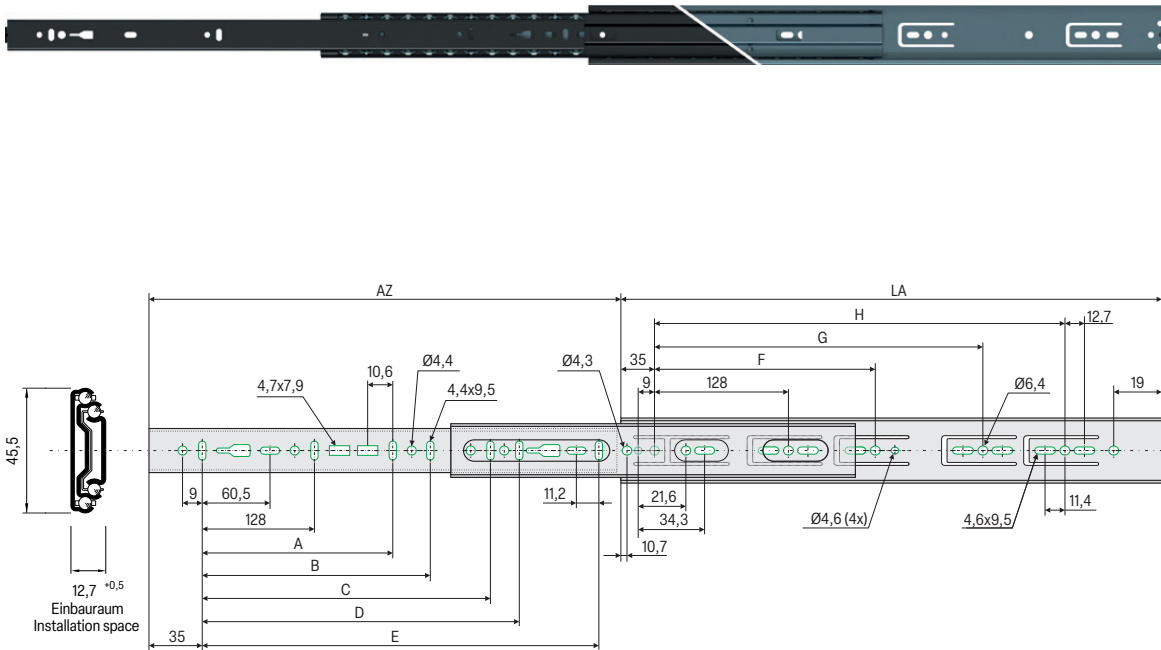

Function: Hold-in, Disconnect, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20720250300	15,07	20720250305	20,71	47	250	254	-	-	-	-	192	-	-	-	0,38
20720300300	15,01	20720300305	20,65	48	300	305	-	-	-	-	242	224	-	-	0,45
20720350300	15,19	20720350305	20,83	49	350	356	-	-	-	-	292	224	-	-	0,53
20720400300	15,49	20720400305	21,13	50	400	406	-	-	-	-	342	224	320	-	0,61
20720450300	15,71	20720450305	21,35	50	450	457	-	-	320	-	392	224	352	-	0,68
20720500300	15,97	20720500305	21,61	50	500	508	-	-	320	-	442	224	416	-	0,76
20720550300	16,39	20720550305	22,03	50	550	559	-	-	320	416	492	224	352	448	0,84
20720600300	16,85	20720600305	22,49	50	600	610	224	-	416	-	542	224	352	480	0,93
20720650300	17,20	20720650305	22,84	49	650	660	224	-	416	544	592	224	352	544	1,00
20720700300	17,81	20720700305	23,45	48	700	711	224	288	416	544	642	224	352	544	1,08

Series 044

Load capacity up to 75 kg/pair

Over extension, Cross section 19,0 x 35,2 mm

Material/ Refinement


Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

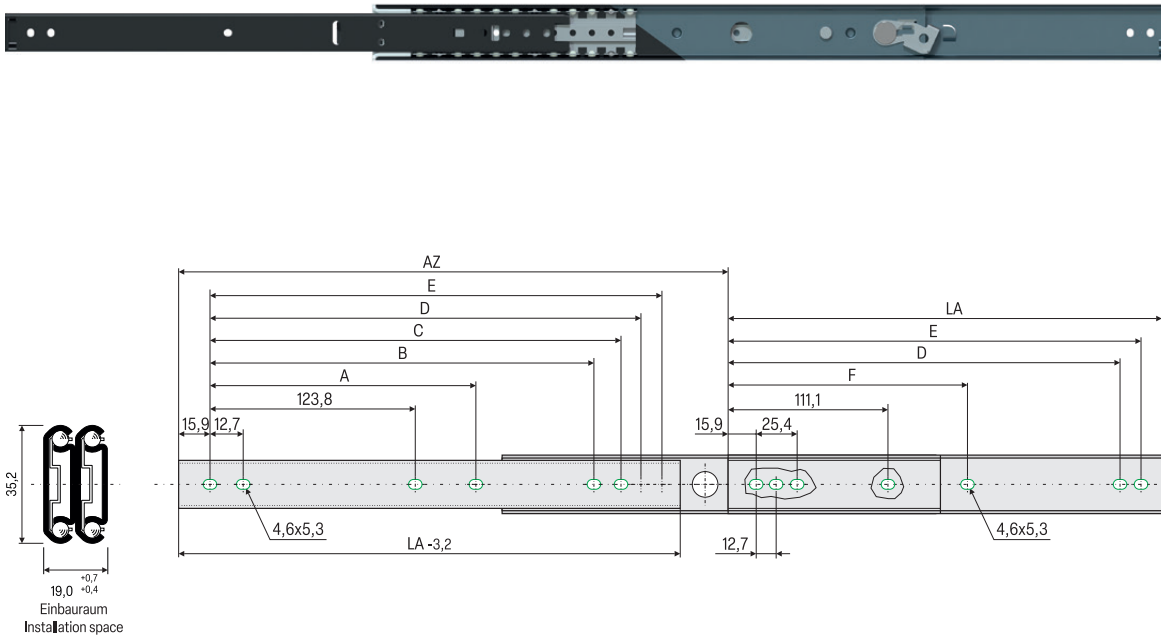

Function: Lock-out, Disconnect, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20440305800	36,32	20440305805	41,96	60	305	312	-	-	-	260,3	273,0	-	0,56
20440356800	37,80	20440356805	43,44	62	356	377	-	-	298,4	311,1	323,8	-	0,66
20440406800	40,12	20440406805	45,76	65	406	429	-	-	349,2	361,9	374,6	250,8	0,76
20440457800	42,56	20440457805	48,20	67	457	480	212,7	-	400,0	412,7	425,4	301,6	0,86
20440508800	44,84	20440508805	50,48	70	508	527	238,1	365,1	450,9	463,6	476,3	352,4	0,96
20440559800	47,35	20440559805	52,99	70	559	581	263,5	415,9	501,6	514,3	527,0	403,2	1,05
20440610800	49,71	20440610805	55,35	75	610	632	288,9	466,7	552,4	565,1	577,8	454,0	1,14
20440660800	51,71	20440660805	57,35	75	660	683	314,3	517,5	603,2	615,9	628,6	504,8	1,23
20440711800	52,75	20440711805	58,39	75	711	738	339,7	568,3	654,0	666,7	679,4	555,6	1,44



Series 036

Load capacity up to 75 kg/pair

Over extension, Cross section 13,0 x 52,6 mm

Material/ Refinement


Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

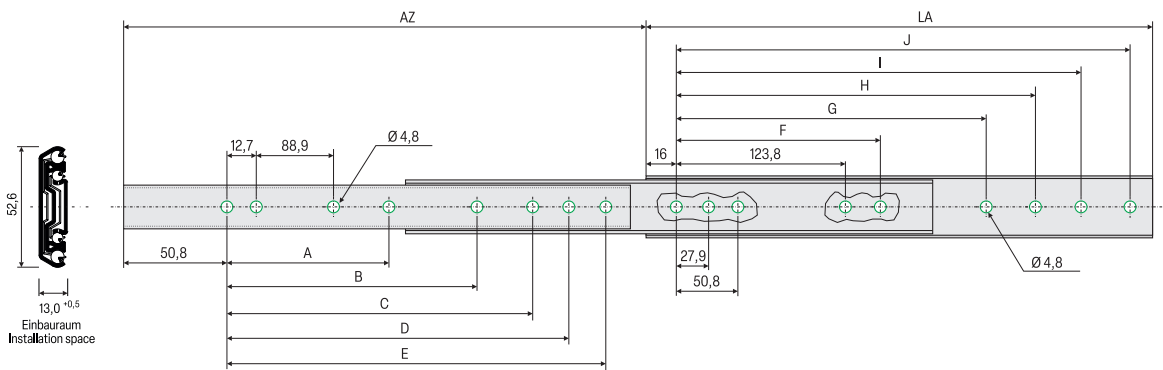

Function: Hold-in, Hold-out

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	I	J	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20360305220	18,71	20360305225	24,35	75	305	330	-	-	200,1	212,8	225,5	-	-	209,5	234,9	260,3	0,66
20360356220	19,33	20360356225	24,97	74	356	381	-	-	250,9	263,6	276,3	-	-	260,3	285,7	311,1	0,77
20360406220	19,88	20360406225	25,52	74	406	432	-	-	301,7	314,4	327,1	-	-	311,1	336,5	361,9	0,88
20360457220	21,23	20360457225	26,87	73	457	483	143,0	279,4	352,5	365,2	377,9	177,8	314,4	361,9	387,3	412,7	0,98
20360508220	23,93	20360508225	29,57	73	508	533	168,4	330,2	403,3	416,0	428,7	203,2	365,2	412,7	438,1	463,5	1,10
20360559220	27,20	20360559225	32,84	70	559	584	193,8	381,0	454,1	466,8	479,5	228,6	416,0	463,5	488,9	514,3	1,19
20360610220	28,38	20360610225	34,02	67	610	635	219,2	431,8	504,9	517,6	530,3	254	466,8	514,3	539,7	565,1	1,32
20360660220	29,34	20360660225	34,98	64	660	686	244,6	482,6	555,7	568,4	581,1	279,4	517,6	565,1	590,5	615,9	1,43
20360711220	29,95	20360711225	35,59	61	711	737	270,0	533,4	606,5	619,2	631,9	304,8	568,4	615,9	641,3	666,7	1,53

Series 036

Load capacity up to 45 kg/pair

Over extension, Cross section 13,0 x 52,6 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:


LA = Length

AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

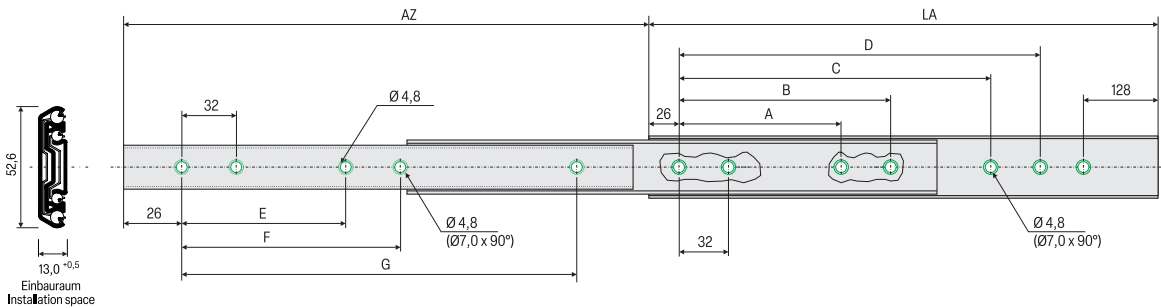

Function: Soft-close, Hold-out

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20360406660	26,58	20360406665	32,22	45	406	400	160	192	-	-	128	160	288	0,80
20360457660	27,93	20360457665	33,57	43	457	449	192	224	-	-	160	192	320	0,93
20360508660	30,63	20360508665	36,27	43	508	499	160	192	256	288	192	224	384	1,04
20360559660	33,90	20360559665	39,54	42	559	548	192	224	288	320	192	224	416	1,16
20360610660	35,08	20360610665	40,72	41	610	597	224	256	352	384	224	256	480	1,28
20360660660	36,04	20360660665	41,68	39	660	648	256	288	384	416	224	256	512	1,40
20360711660	36,65	20360711665	42,29	36	711	695	288	320	448	480	256	288	576	1,52

Series 037

Load capacity up to 100 kg/pair

Over extension, Cross section 16,0 x 57,5 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:


LA = Length

AZ = Travel parth

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

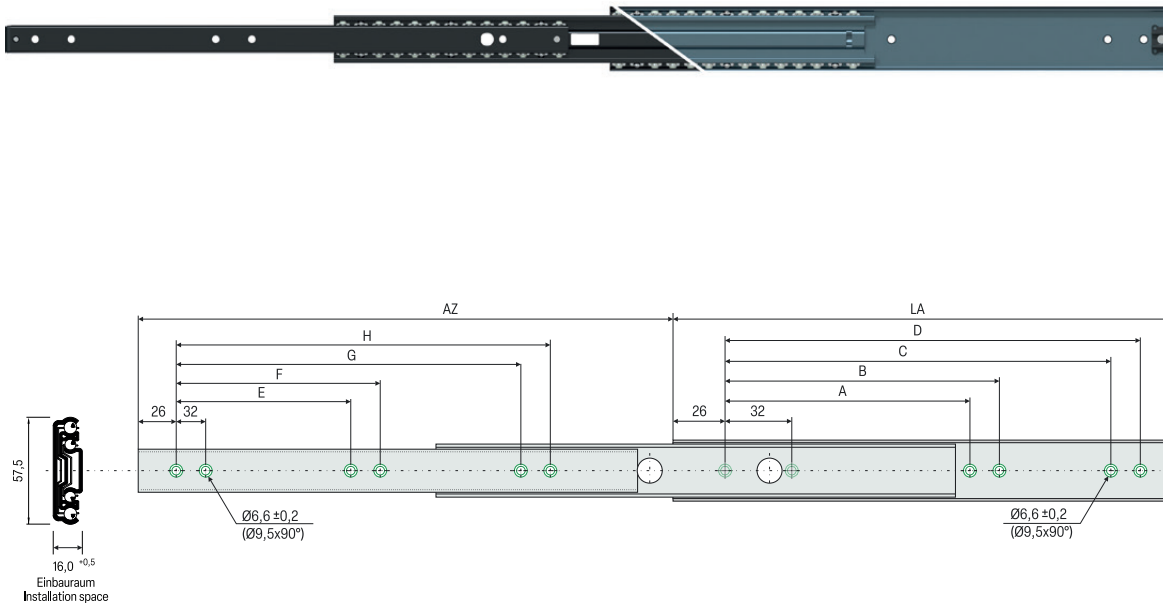

Function: Hold-in, Hold-out, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20370300280	23,62	20370300285	29,26	89	300	340	-	-	218	250	-	-	-	252	0,82
20370350280	24,48	20370350285	30,12	89	350	389	-	-	218	250	-	-	-	252	0,97
20370400280	25,59	20370400285	31,23	91	400	438	160	192	218	350	128	160	-	352	1,11
20370450280	26,39	20370450285	32,03	93	450	487	160	192	320	352	128	160	320	352	1,27
20370500280	27,19	20370500285	32,83	100	500	537	192	224	416	448	160	192	-	416	1,41
20370550280	27,98	20370550285	33,62	100	550	586	224	-	448	480	160	192	-	448	1,56
20370600280	28,77	20370600285	34,41	93	600	635	256	288	480	512	192	224	480	512	1,71
20370650280	29,57	20370650285	35,21	91	650	684	288	320	544	576	192	256	-	544	1,84
20370700280	30,36	20370700285	36,00	86	700	733	288	416	576	608	256	288	576	608	2,00
20370750280	31,14	20370750285	36,78	84	750	784	288	512	608	640	256	320	-	701	2,13

Series 037

Load capacity up to 60 kg/pair

Over extension, Cross section 16,0 x 57,5 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

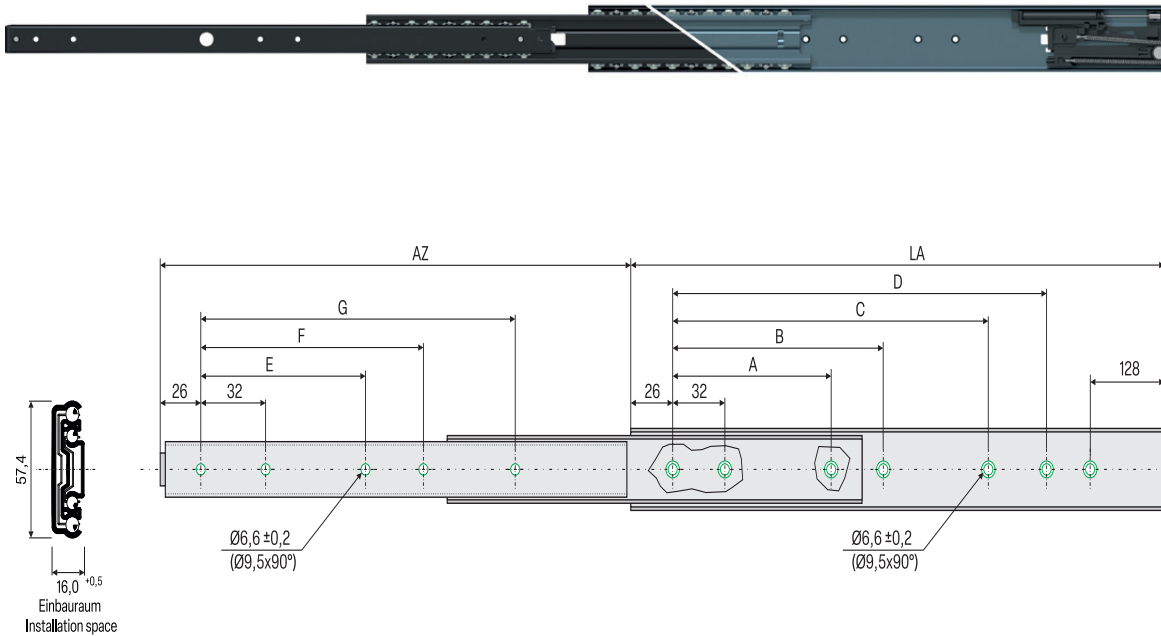

Function: Soft-close, Hold-out, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20370400720	32,29	20370400725	37,93	50	400	400	160	192	-	-	128	160	288	1,11
20370450720	33,09	20370450725	38,73	50	450	449	192	224	-	-	160	192	320	1,27
20370500720	33,89	20370500725	39,53	55	500	499	160	192	256	288	192	224	384	1,41
20370550720	34,68	20370550725	40,32	55	550	548	192	224	288	320	192	224	416	1,56
20370600720	35,47	20370600725	41,11	55	600	597	224	256	352	384	224	256	480	1,71
20370650720	36,27	20370650725	41,91	58	650	648	256	288	384	416	224	256	512	1,86
20370700720	37,06	20370700725	42,70	60	700	695	288	320	448	480	256	288	576	2,00
20370750720	37,84	20370750725	43,48	60	750	748	320	352	480	512	256	288	626	2,20

Series 038

Load capacity up to 100 kg/pair

Over extension, Cross section 17,5 x 57,4 mm

Material/ Refinement


Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

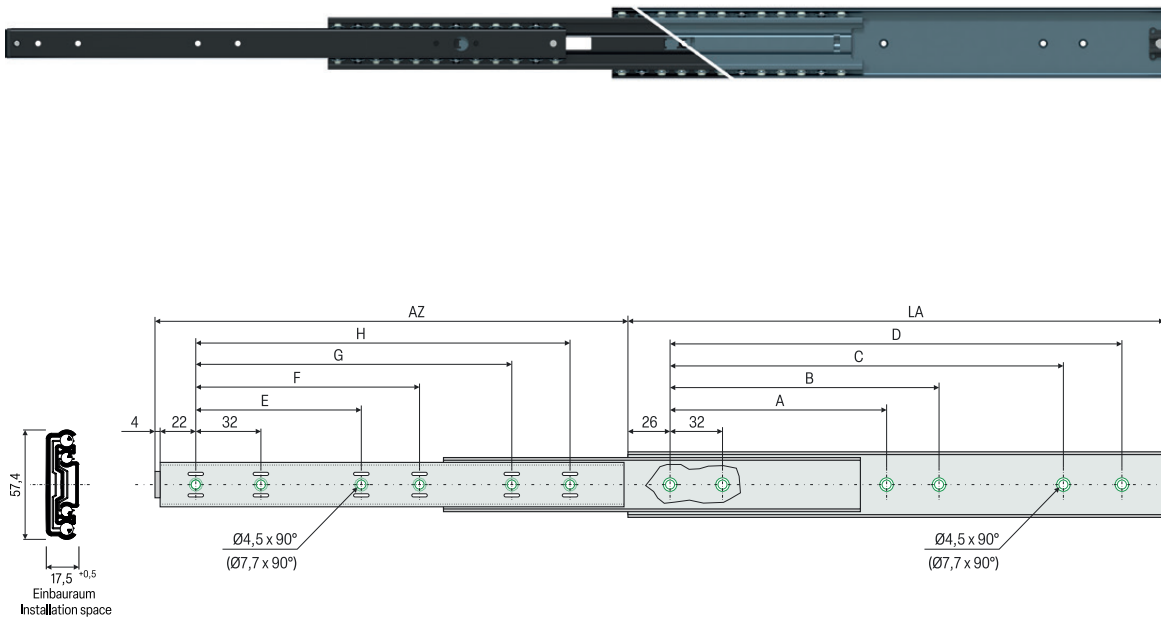

Function: Hold-in, Hold-out, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20380300280	30,26	20380300285	35,90	89	300	340	-	-	218	250	-	-	-	252	0,66
20380350280	31,20	20380350285	36,84	89	350	389	-	-	218	250	-	-	-	252	0,77
20380400280	31,89	20380400285	37,53	91	400	438	160	192	318	350	128	160	-	352	0,88
20380450280	33,12	20380450285	38,76	93	450	487	160	192	320	352	128	160	320	352	0,98
20380500280	34,22	20380500285	39,86	100	500	537	192	224	416	448	160	192	-	416	1,10
20380550280	35,03	20380550285	40,67	100	550	586	224	-	448	480	160	192	-	448	1,19
20380600280	36,05	20380600285	41,89	93	600	635	256	288	480	512	192	224	480	512	1,32
20380650280	36,50	20380650285	42,14	91	650	684	288	320	544	576	192	256	-	544	1,43
20380700280	37,09	20380700285	42,73	86	700	733	288	416	576	608	256	288	576	608	1,53

Series 038

Load capacity up to 60 kg/pair

Over extension, Cross section 17,5 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

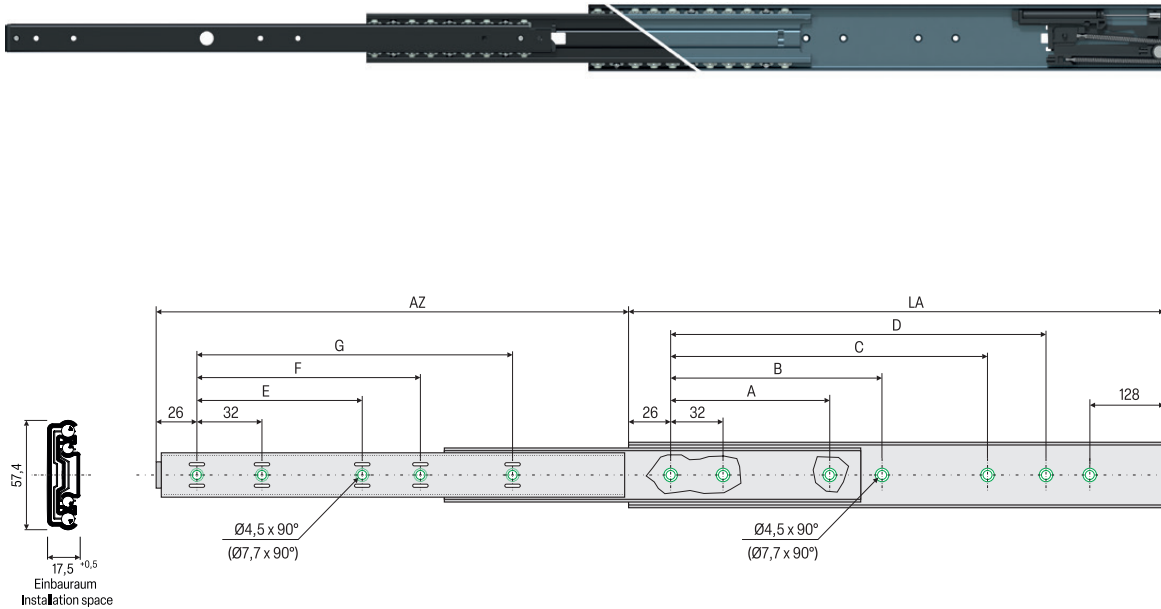

Function: Soft-close, Hold-out, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20380400720	38,59	20380400725	44,23	49	400	400	160	192	-	-	128	160	288	1,11
20380450720	39,82	20380450725	45,46	49	450	449	192	224	-	-	160	192	320	1,27
20380500720	40,92	20380500725	46,56	55	500	499	160	192	256	288	192	224	384	1,41
20380550720	41,73	20380550725	47,37	55	550	548	192	224	288	320	192	224	416	1,56
20380600720	42,75	20380600725	48,37	55	600	597	224	256	352	384	224	256	480	1,71
20380650720	43,20	20380650725	48,84	58	650	648	256	288	384	416	224	256	512	1,87
20380700720	43,79	20380700725	49,43	60	700	695	288	320	448	480	256	288	576	2,00

Series 039

Load capacity up to 155 kg/pair

Full extension, Cross section 19,0 x 57,4 mm

Material/ Refinement


Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel parth
TK = Load capacity at
10.000 Cycles
 Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

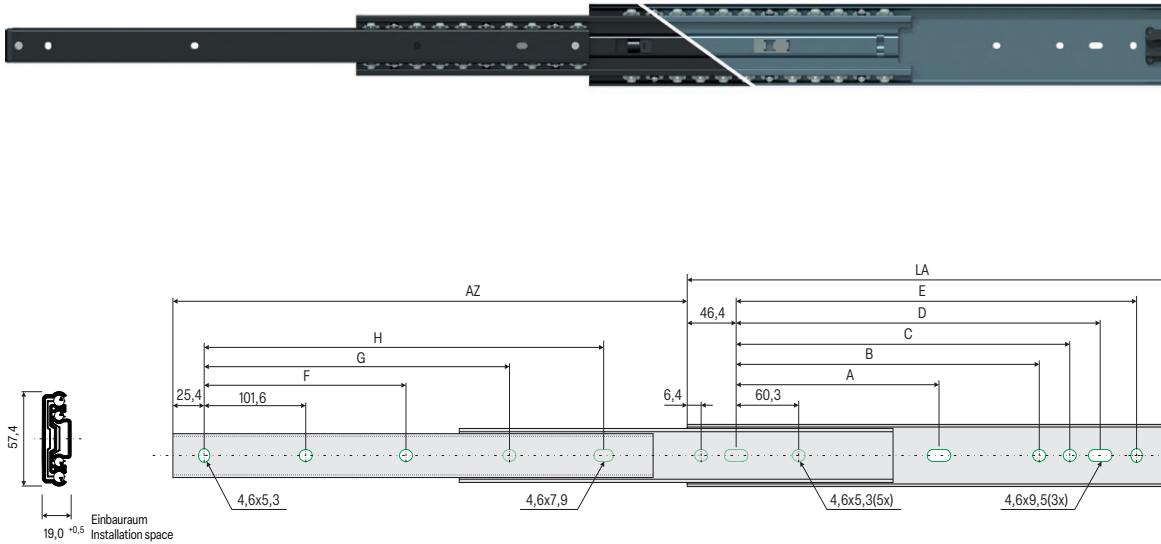

Function: Hold-in, Hold-out, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20390305280	38,87	20390305285	44,51	98	305	305	-	135	179	205	230	-	-	229	0,90
20390356280	39,82	20390356285	45,46	98	356	356	-	186	230	255	281	-	-	279	1,04
20390406280	40,72	20390406285	46,36	111	406	406	-	237	281	306	332	-	257	330	1,25
20390457280	41,78	20390457285	47,42	121	457	457	-	288	332	357	382	-	308	381	1,36
20390508280	43,00	20390508285	48,64	155	508	508	216	339	382	408	433	203	359	432	1,51
20390559280	45,22	20390559285	50,86	121	559	559	241	389	433	459	484	229	410	483	1,68
20390610280	47,89	20390610285	53,53	111	610	610	267	440	484	509	535	254	461	533	1,82
20390660280	50,03	20390660285	55,67	102	660	660	292	491	535	560	586	279	511	584	1,98
20390711280	52,23	20390711285	57,87	90	711	711	318	542	586	611	636	305	562	635	2,11

Series 039

Load capacity up to 75 kg/pair

Full extension, Cross section 19,0 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

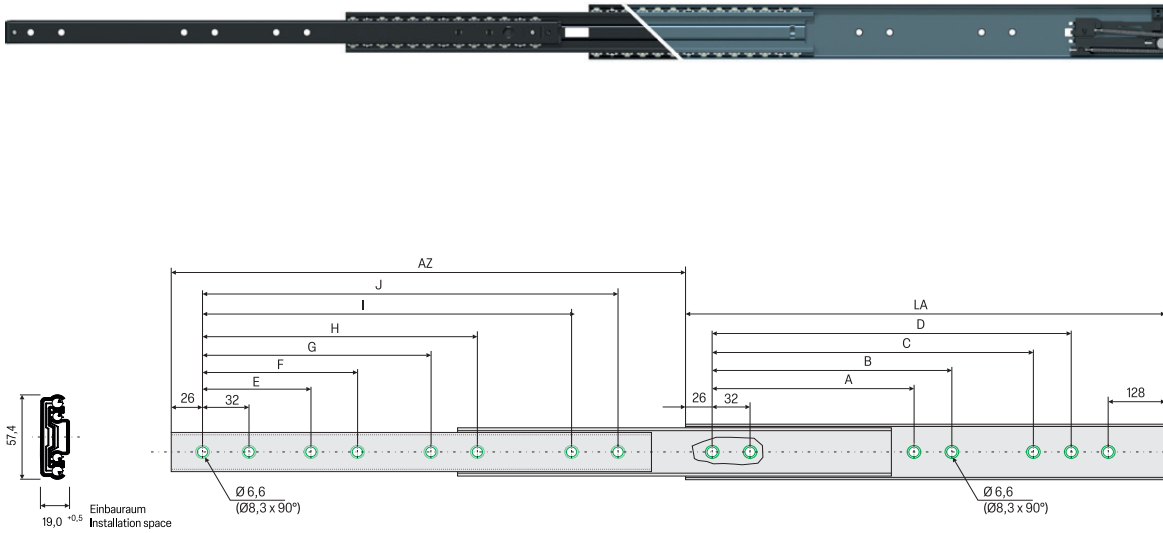

Function: Self-close, Hold-out, Air Motion®

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	I	G	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20390406610	44,16	20390406615	49,80	60	406	406	160	192	-	-	128	160	256	288	-	-	1,09
20390457610	45,22	20390457615	50,86	66	457	457	160	192	256	288	128	160	288	320	-	-	1,24
20390508610	47,00	20390508615	52,64	75	508	508	192	224	320	352	160	192	352	384	-	-	1,40
20390559610	48,66	20390559615	54,30	66	559	559	192	224	320	352	160	192	416	448	-	-	1,55
20390610610	51,33	20390610615	56,97	60	610	610	256	288	384	416	160	192	256	288	448	480	1,70
20390660610	53,47	20390660615	59,11	55	660	660	256	288	416	448	160	192	256	288	512	544	1,85
20390711610	55,67	20390711615	61,31	50	711	711	256	320	448	480	256	288	544	576	-	-	2,01

Series 048

Load capacity up to 150 kg/pair

Over extension, Cross section 34,0 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test

Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:


LA = Length

AZ = Travel path

TK = Load capacity at
10.000 Cycles

○ Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

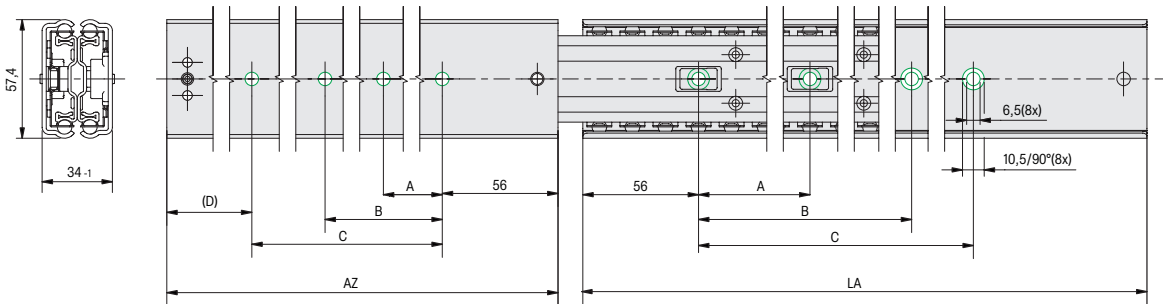

Function: Hold-in

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	Weight
Model 1, ZM100	€/net	Model 2, RAL7016	€/net	10.000	mm	mm	mm	mm	mm	mm	kg/piece
20480800020	56,12	20480800025	61,76	150	800	800	224	448	672	72	3,90
20480900020	58,62	20480900025	64,26	140	900	904	240	514	788	56	4,16
20481000020	61,01	20481000025	66,65	130	1000	1008	288	576	864	80	4,60
20481100020	63,70	20481100025	69,34	125	1100	1112	192	576	960	84	5,08
20481200020	66,01	20481200025	71,65	120	1200	1216	320	704	1088	56	5,50

Series 070

Load capacity up to 160 kg/pair

Full extension, Cross section 19,0 x 57,4 mm

Material/ Refinement

Model 1

ZM100 steel strip
(zinc-magnesium)
coated
120 h salt spray test


Model 2

ZM100 steel strip
(zinc-magnesium)
coated, additionally
powder-coated
RAL 7016
200 h salt spray test

Notes:

LA = Length
AZ = Travel path
TK = Load capacity at
10.000 Cycles
● Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

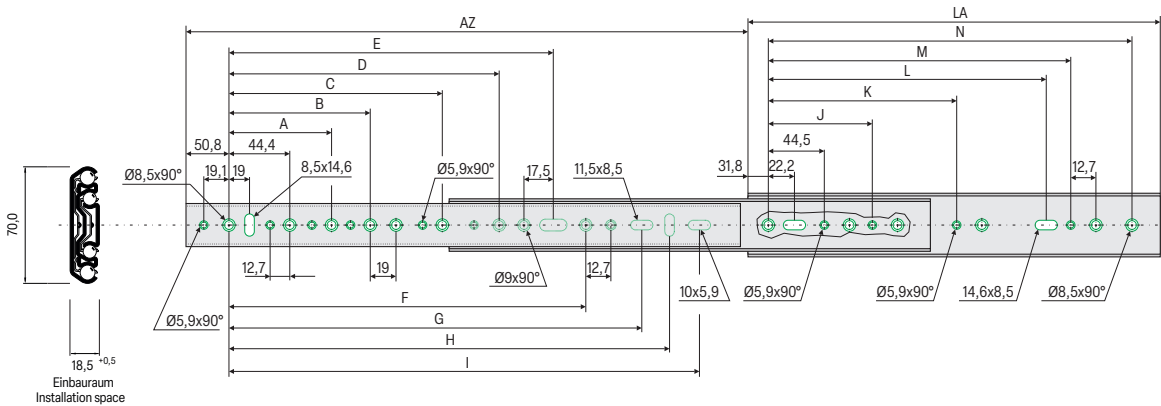

Function: Hold-in

Article no.	Price	Article no.	Price	TK/kg	LA	AZ	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Weight
ZM100	€/net	RAL 7016	€/net	10.000	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/piece
20700305020	29,01	20700305025	34,65	140	305	305	-	-	-	-	-	-	-	179	199	-	-	184	200	238	1,19
20700356020	31,33	20700356025	36,97	140	356	356	-	-	-	-	-	-	-	230	249	-	-	235	251	289	1,40
20700406020	33,68	20700406025	39,32	150	406	406	108	-	-	-	-	237	262	281	300	-	-	286	302	340	1,60
20700457020	35,96	20700457025	41,60	150	457	457	108	-	-	-	-	287	313	332	351	-	-	337	353	391	1,81
20700508020	38,33	20700508025	43,97	160	508	508	108	172	-	-	-	338	364	383	402	-	-	387	403	442	2,02
20700559020	40,70	20700559025	46,34	160	559	559	108	172	-	-	329	389	414	433	453	-	-	438	454	492	2,21
20700610020	43,07	20700610025	48,71	160	610	610	108	172	-	-	380	440	465	484	503	-	-	489	505	543	2,42
20700660020	45,05	20700660025	50,69	160	660	660	108	172	-	-	430	491	516	535	554	-	-	540	556	594	2,64
2070071020	47,72	2070071025	53,36	160	711	711	108	172	-	-	481	541	567	586	605	-	-	591	607	645	2,94
20700762020	50,43	20700762025	56,07	160	762	762	108	172	-	-	532	592	618	637	656	203	470	641	657	696	3,03
20700813020	52,40	20700813025	58,04	160	813	813	108	172	-	-	583	643	668	687	707	203	521	692	708	746	3,24
20700864020	54,64	20700864025	60,28	160	864	864	108	172	349	-	634	694	719	738	757	203	572	743	759	797	3,44
20700914020	101,11	20700914025	106,75	160	914	914	108	172	349	502	684	745	770	789	808	203	622	794	810	848	3,65


Series 076

Load capacity up to 230 kg/pair


Full extension, Cross section 19,1 x 76,0 mm

Material/ Refinement

Steel strip
individually galvanized
120 h salt spray test

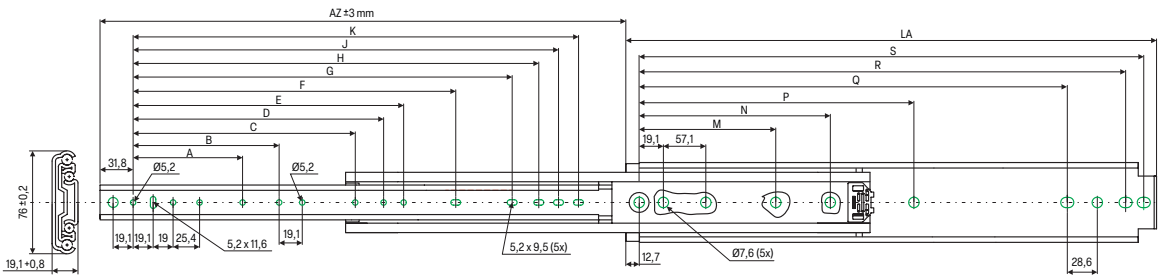

Notes:

- LA = Length
- AZ = Travel path
- TK = Load capacity at 10.000 Cycles
-  Hole pattern

Other versions, lengths, functions and materials such as stainless steel on request.

Function: Soft-stop

Article no.	Price €/net Pair	TK / kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	M mm	N mm	P mm	Q mm	R mm	S mm	Weight kg/St
07000970001	34,28	230	254	254	-	-	-	-	-	-	103,1	128,5	147,6	166,6	-	-	-	152,4	209,6	228,6	1,18
07000970002	41,12	230	305	305	-	-	-	-	-	-	153,9	179,3	198,4	217,4	-	-	-	203,2	260,4	279,4	1,41
07000970003	48,00	230	356	356	-	-	-	-	-	-	204,7	230,1	249,2	268,2	-	-	-	254,0	311,2	330,2	1,65
07000970004	54,84	230	406	406	127	-	-	-	-	-	255,5	280,9	299,9	319,0	-	-	-	304,8	361,9	381,0	1,89
07000970005	60,92	230	457	457	127	-	-	-	-	246,1	306,3	331,7	350,8	369,8	-	-	-	355,6	412,8	431,8	2,11
07000970006	68,56	230	508	508	127	190,5	-	-	-	296,9	357,1	382,5	401,6	420,6	-	-	-	406,4	463,6	482,6	2,35
07000970007	75,40	215	559	559	127	190,5	-	-	-	347,7	407,9	433,3	452,4	471,4	-	-	-	457,2	514,4	533,4	2,59
07000970008	82,28	215	610	610	127	190,5	-	-	-	398,5	458,7	484,1	503,2	522,2	-	-	-	508,0	565,2	584,2	2,82
07000970009	91,28	200	660	660	127	190,5	-	-	-	449,3	509,5	534,9	553,9	573,0	-	-	-	558,8	615,9	635,0	3,05
07000970010	96,00	200	711	711	127	190,5	-	-	-	-	560,3	585,7	604,8	623,8	-	-	-	609,6	666,8	685,8	3,29
07000970011	102,84	200	762	762	127	190,5	368,3	-	-	550,9	611,1	636,5	655,6	674,6	235	-	501,6	660,4	717,6	736,6	3,53
07000970012	109,68	190	813	813	127	-	368,3	-	-	601,7	661,1	687,3	706,4	725,4	235	393,7	552,5	711,2	768,4	787,4	3,76
07000970013	116,56	190	864	864	127	190,5	368,3	469,9	-	652,5	712,7	738,1	757,2	776,2	235	419,1	603,3	762,0	819,2	838,2	4,00
07000970014	123,40	190	914	914	127	190,5	368,3	520,7	-	703,3	763,5	788,9	808,0	827,0	235	444,5	654,1	812,8	870,0	889,0	4,23
07000970015	130,28	180	964	964	127	190,5	368,3	520,7	-	754,1	814,3	839,7	858,8	877,8	235	469,9	704,9	863,6	920,8	939,8	4,46
07000970016	137,12	180	1016	1016	127	190,5	368,3	520,7	-	804,9	865,1	890,5	909,6	928,6	235	495,3	755,7	914,4	971,6	990,6	4,70
07000970017	143,96	170	1067	1067	127	190,5	368,3	520,7	-	855,7	915,9	941,3	960,4	979,4	235	546,1	806,5	965,2	1022,4	1041,4	4,94
07000970018	150,84	160	1118	1118	127	190,5	368,3	520,7	-	906,5	966,7	992,1	1011,2	1030,2	235	546,1	857,3	1016,0	1073,2	1092,2	5,17
07000970019	157,68	160	1168	1168	127	190,5	368,3	520,7	-	957,3	1017,5	1042,9	1062	1081,0	235	571,5	908,1	1066,8	1124,0	1143,0	5,40
07000970020	164,56	150	1219	1219	127	190,5	368,3	520,7	825,5	1008,1	1068,3	1093,7	1112,8	1131,8	235	596,9	958,8	1117,6	1174,8	1193,8	5,64
07000970021	171,40	150	1270	1270	127	190,5	368,3	520,7	825,5	1058,9	1119,1	1144,5	1163,6	1182,6	235	596,9	958,8	1168,4	1225,6	1244,6	5,88
07000970022	178,24	140	1321	1321	127	190,5	368,3	520,7	825,5	1109,7	1169,9	1195,3	1214,4	1233,4	235	596,9	958,8	1219,2	1276,4	1295,4	6,11
07000970023	185,12	140	1372	1372	127	190,5	368,3	520,7	825,5	1160,5	1220,7	1246,1	1265,2	1284,2	235	596,9	958,8	1270,0	1327,2	1346,2	6,35
07000970024	191,96	135	1422	1422	127	190,5	368,3	520,7	825,5	1211,3	1271,5	1296,9	1316	1335	235	596,9	958,8	1320,8	1378	1397,0	6,58
07000970025	198,84	135	1473	1473	127	190,5	368,3	520,7	825,5	1262,1	1322,3	1347,7	1366,8	1385,8	235	596,9	958,8	1371,6	1428,8	1447,8	6,81
07000970026	205,68	130	1524	1524	127	190,5	368,3	520,7	825,5	1312,9	1373,1	1398,5	1417,6	1436,6	235	596,9	958,8	1422,4	1479,6	1498,6	7,05


Series 076

Load capacity up to 230 kg/pair


Full extension, Cross section 19,1 x 76,0 mm

Material/ Refinement

Steel strip
individually galvanized
120 h salt spray test

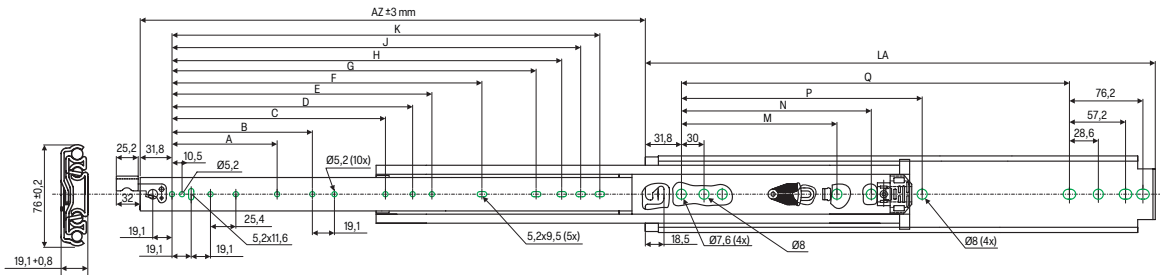

Notes:

- LA = Length
- AZ = Travel path
- TK = Load capacity at 10.000 Cycles
-  Hole pattern

Other versions, lengths, functions and materials such as stainless steel on request.

Function: Soft-stop, Lock-out, Lock-in

Article no.	Price €/net Pair	TK / kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	M mm	N mm	P mm	Q mm	Weight kg/piece
07000971001	62,92	230	305	305	-	-	-	-	-	-	153,9	179,3	198,4	217,4	-	-	-	184,1	1,47
07000971002	69,76	230	356	356	-	-	-	-	-	-	204,7	230,1	249,2	268,2	-	-	-	234,9	1,71
07000971003	76,60	230	406	406	-	-	-	-	-	-	255,5	280,9	299,9	319,0	-	-	-	285,7	1,96
07000971004	83,48	230	457	457	-	-	-	-	-	246,1	306,3	331,7	350,8	369,8	-	-	-	336,5	2,20
07000971005	90,32	230	508	508	-	-	-	-	-	296,9	357,1	382,5	401,6	420,6	-	-	-	387,3	2,45
07000971006	97,20	215	559	559	127	-	-	-	-	347,7	407,9	433,3	452,4	471,4	-	-	-	438,1	2,69
07000971007	104,04	215	610	610	127	-	-	-	-	398,5	458,7	484,1	503,2	522,2	-	-	-	488,9	2,94
07000971008	110,88	200	660	660	127	190,5	-	-	-	449,3	509,5	534,9	553,9	573,0	-	-	-	539,7	3,18
07000971009	117,76	200	711	711	127	190,5	-	-	-	500,1	560,3	585,7	604,8	623,8	-	-	-	590,5	3,42
07000971010	124,16	200	762	762	127	190,5	368,3	-	-	550,9	611,1	636,5	655,6	674,6	215,9	-	482,5	641,3	3,76
07000971011	131,48	190	813	813	127	190,5	-	-	-	601,7	661,9	687,3	706,4	725,4	215,9	374,6	533,1	692,1	3,92
07000971012	138,32	190	864	864	127	190,5	-	469,9	-	652,5	712,7	738,1	757,2	776,2	215,9	400,0	584,2	742,9	4,16
07000971013	145,20	190	914	914	127	190,5	-	520,7	-	703,3	763,5	788,9	808,0	827,0	215,9	425,4	635,0	793,7	4,40
07000971014	152,04	180	964	964	127	190,5	-	520,7	-	754,1	814,3	839,7	858,8	877,8	215,9	450,8	685,8	844,5	4,62
07000971015	158,88	180	1016	1016	127	190,5	368,3	520,7	-	804,9	865,1	890,5	909,4	928,6	215,9	476,2	736,6	895,3	4,89
07000971016	165,76	170	1067	1067	127	190,5	368,3	520,7	723,9	855,7	915,9	941,3	960,4	979,4	215,9	527,0	787,4	946,1	5,14
07000971017	172,60	160	1118	1118	127	190,5	368,3	-	-	906,5	966,7	992,1	1011,2	1030,2	215,9	527,0	838,2	996,9	5,38
07000971018	179,44	160	1168	1168	127	190,5	368,3	-	-	957,3	1017,5	1042,9	1062,0	1081,0	215,9	552,4	889,0	1047,7	5,63
07000971019	186,32	150	1219	1219	127	190,5	368,3	-	825,5	1008,1	1068,3	1093,7	1112,8	1131,8	215,9	577,8	939,7	1098,5	5,87
07000971020	193,16	150	1270	1270	127	190,5	368,3	-	825,5	1058,9	1119,1	1144,5	1163,6	1182,6	215,9	577,8	939,7	1149,3	6,12
07000971021	200,00	140	1321	1321	127	190,5	368,3	520,7	825,5	1109,7	1169,9	1195,3	1214,4	1233,4	215,9	577,8	939,7	1200,1	6,36
07000971022	206,88	140	1372	1372	127	190,5	368,3	520,7	825,5	1160,5	1220,7	1246,1	1265,2	1284,2	215,9	-	939,7	1250,9	6,61
07000971023	214,74	135	1422	1422	127	190,5	368,3	520,7	825,5	1211,3	1271,5	1296,9	1316,0	1335,0	215,9	-	939,7	1301,7	6,85
07000971024	220,16	135	1473	1473	127	190,5	368,3	520,7	825,5	1262,1	1322,3	1347,7	1366,8	1385,8	215,9	577,8	939,7	1352,5	7,09
07000971025	227,44	130	1524	1524	127	190,5	368,3	520,7	825,5	1312,9	1373,1	1398,5	1417,6	1436,6	215,9	577,8	939,7	1403,3	7,34



Series 038

Load capacity up to 40 kg/pair


Over extension, Cross section 17,5 x 57,4 mm

Material/ Refinement

Aluminum
AlMg4,5Mn

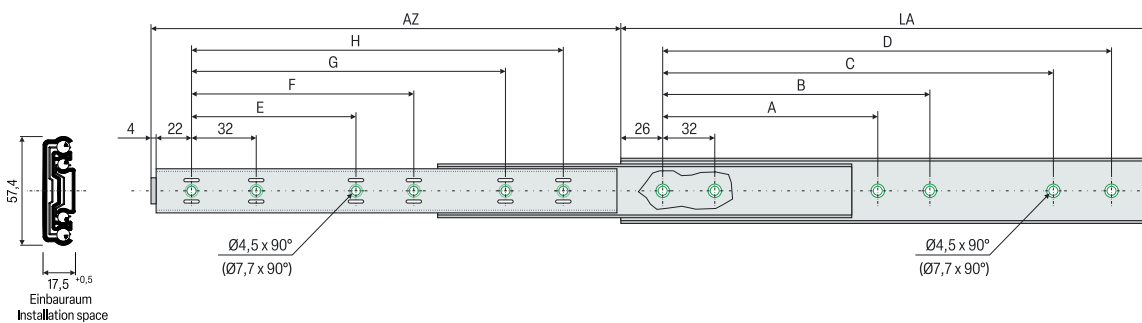

Notes:

- LA = Length
- AZ = Travel path
- TK = Load capacity at 10.000 Cycles
-  Hole pattern

Other versions, lengths, functions and materials such as stainless steel on request.

Function: Hold-in, Hold-out, Air Motion®

Article no.	Price €/net	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg/piece
24380300280	42,36	37	300	340	-	-	218	250	-	-	-	252	0,26
24380350280	43,68	37	350	389	-	-	218	250	-	-	-	252	0,31
24380400280	44,65	38	400	438	160	192	318	350	128	160	-	352	0,35
24380450280	46,37	39	450	487	160	192	320	352	128	160	320	352	0,39
24380500280	47,91	40	500	537	192	224	416	448	160	192	-	416	0,44
24380550280	49,04	40	550	586	224	-	448	480	160	192	-	448	0,48
24380600280	50,47	39	600	635	256	288	480	512	192	224	480	512	0,53
24380650280	51,10	38	650	684	288	320	544	576	192	256	-	544	0,57
24380700280	51,93	37	700	733	288	416	576	608	256	288	576	608	0,61


Series 038

Load capacity up to 35 kg/pair


Over extension, Cross section 17,5 x 57,4 mm

Material/ Refinement

Aluminum
AlMg4,5Mn

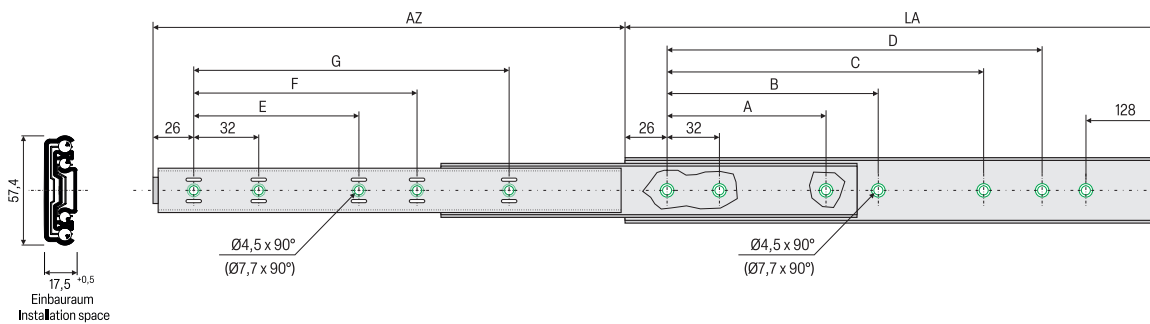

Notes:

- LA = Length
- AZ = Travel path
- TK = Load capacity at 10.000 Cycles
-  Hole pattern

Other versions, lengths, functions and materials such as stainless steel on request.

Function: Soft-close, Hold-out, Air Motion®

Article no.	Price €/net	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg/piece
24380400720	54,03	27	400	400	160	192	-	-	128	160	288	0,44
24380450720	55,75	27	450	449	192	224	-	-	160	192	320	0,51
24380500720	57,29	30	500	499	160	192	256	288	192	224	384	0,56
24380550720	58,42	30	550	548	192	224	288	320	192	224	416	0,62
24380600720	59,85	30	600	597	224	256	352	384	224	256	480	0,68
24380650720	60,48	32	650	648	256	288	384	416	224	256	512	0,75
24380700720	61,31	35	700	695	288	320	448	480	256	288	576	0,80


Series 040

Load capacity Up to 35 kg/pair


Over extension, Cross section 20,0 x 27,2 mm

Material/ Refinement

Stainless steel V2A
1.4301

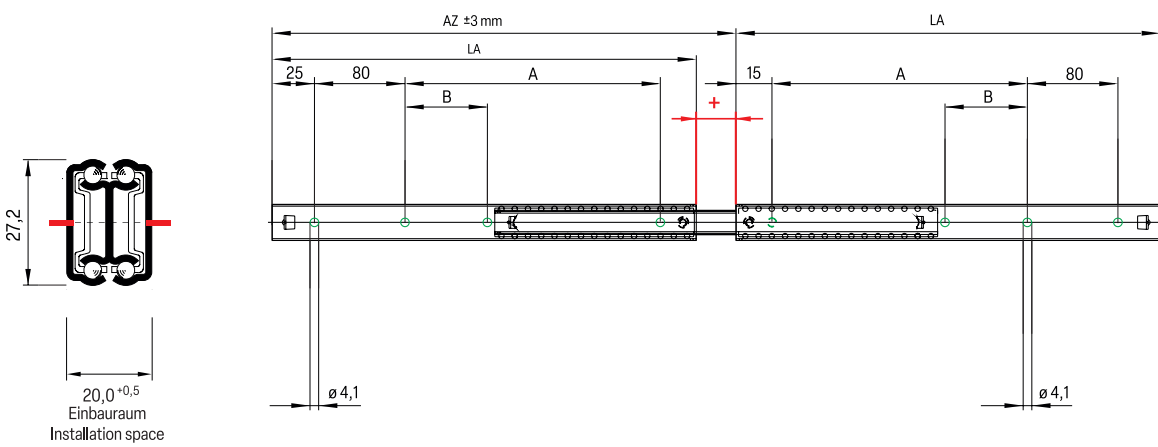

Notes:

- LA = Length
- AZ = Travel path
- TK = Load capacity at 10.000 Cycles
-  Hole pattern

Other versions, lengths, functions and materials such as stainless steel on request.

Function: none

Article no.	Price €/net	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	Weight kg/piece
07000057001	21,50	35	300	326	180	-	0,43
07000057002	22,11	35	350	376	230	70	0,49
07000057003	23,15	34	400	426	280	10	0,57
07000057004	25,08	33	450	476	330	100	0,64
07000057005	27,01	32	500	526	380	140	0,72
07000057006	28,94	30	550	576	430	160	0,82



Series 078

Load capacity Up to 140 kg/pair

Over extension, Cross section 19,5 x 53,0 mm

Material/ Refinement

Stainless steel V2A
1.4301

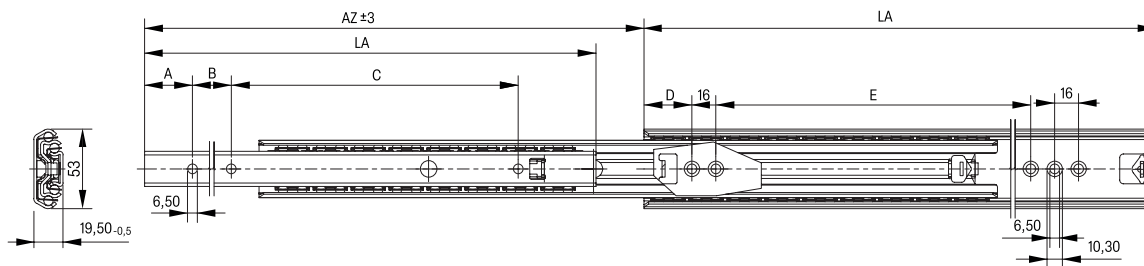

Notes:

LA = Length

AZ = Travel path


TK = Load capacity at
10.000 Cycles
Hole pattern

Other versions,
lengths, functions
and materials such
as stainless steel on
request.

Function: Hold-in

Article no.	Price €/net	TK/kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	D mm	E mm	Weight kg/piece
07000153001	69,96	97	300	337	32	128	80	32	144	0,88
07000153002	81,62	106	350	386	32	128	128	32	240	1,03
07000153003	93,28	114	400	435	32	160	144	32	240	1,17
07000153004	104,94	119	450	484	32	160	192	32	240	1,31
07000153005	116,60	122	500	534	32	224	192	32	368	1,45
07000153006	128,26	127	550	583	32	224	240	32	368	1,61
07000153007	139,92	131	600	632	32	288	224	32	368	1,76
07000153008	151,58	133	650	681	32	288	272	32	368	1,90
07000153009	163,24	136	700	730	32	320	288	32	368	2,05
07000153010	174,90	138	750	780	32	320	336	32	368	2,19
07000153011	186,55	140	800	829	32	320	384	32	448	2,34

Mounting bracket for telescopic slides

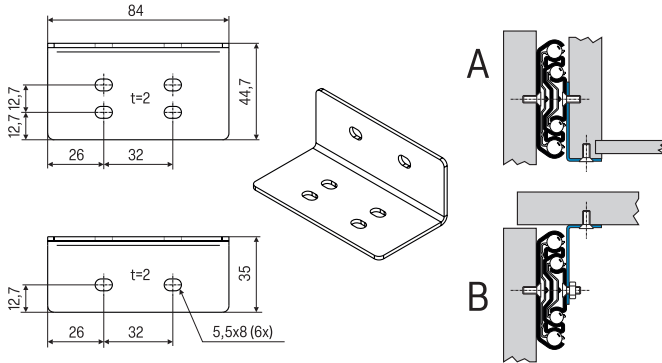


Universal bracket 32

For bottom (A) and platform (B) mounting.
At least 2 brackets per rail required (depending on rail length).
Fixing parts provided by customer.

Suitable for telescopic slides Series
010, 036 (only with Soft-close), **037, 038, 039** (only with self-close)

Article no.	Price €/net per piece	Weight kg/piece
21000000110	3,20	0,10

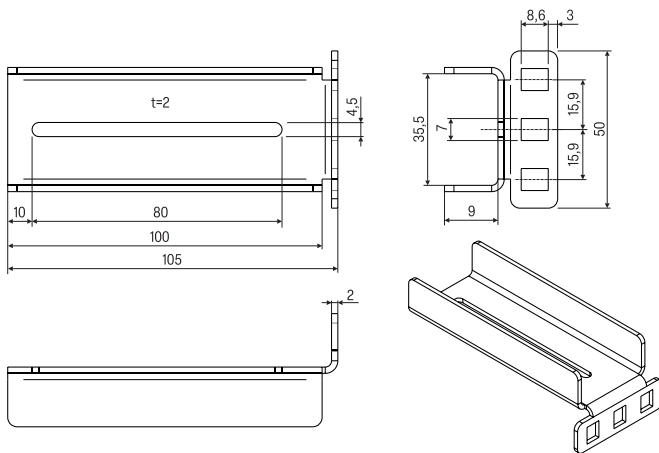


Enclosure mounting bracket 35

Optional brackets are available to simplify the mounting of slides in an electronics rack/enclosure.
You need 2 brackets per telescopic slide. Customer provides small parts.

Suitable for telescopic slides Series
016, 044

Article no.	Price €/net per piece	Weight kg/piece
21000000210	5,20	0,21

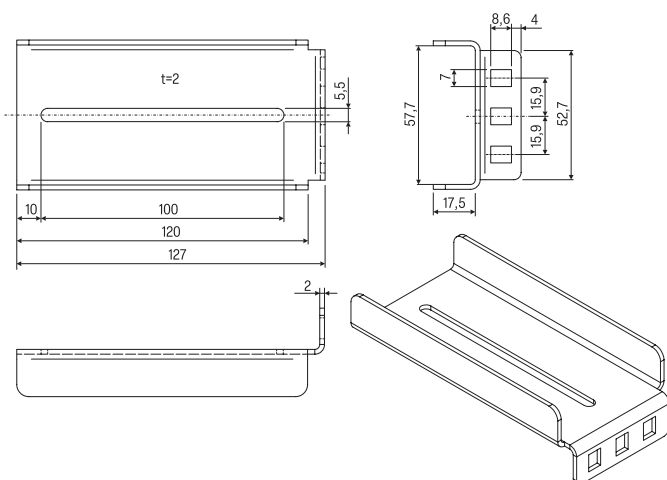

Enclosure mounting bracket 57

Optional brackets are available to simplify the mounting of slides in an electronics rack/enclosure.
You need 2 brackets per telescopic slide. Customer provides small parts.

Suitable for telescopic slides Series
039


Article no.	Price €/net per piece	Weight kg/piece
21000000220	5,20	0,20

INBOX 600

Load capacity up to 120 kg

Pantry unit, Cross section 70,0 x 95,0 mm

Travel path
450 mm

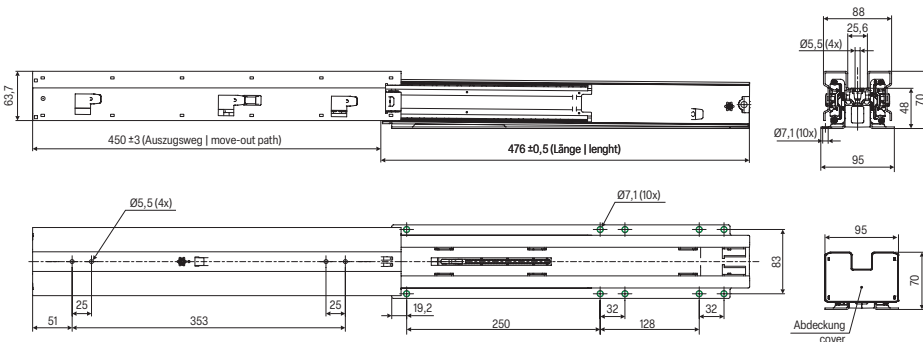

- Load capacity up to 120 kg
- Mounting bracket with front adjustment
- Optional soft-close 115 mm
- Frame support powder-coated RAL 7016

Materials and surfaces:

- Zinc-magnesium surface slide (ZM100)
- Ball cage Zinc-magnesium surface (ZM70)
- Balls made from hardened carbon steel

Temperature range:

- Operating temperature -20°C bis +70°C
- Operating temperature with Soft-Close +10°C up to +40°C

Article no.	Price €/net per piece	TK / kg 10.000 Cycles	LA mm	AZ mm	Option	Weight kg/piece
20910476000	159,60	120	476	450	without front cover	5,90

Additional features





Article no.	Price €/net per piece	Description
21910476060	16,12	Soft-close
21910476900	1,63	Adjustment screws
21910476920	3,69	Front cover
21910476990	3,34	Your logo on the front cover

INBOX 400

Load capacity up to 35 kg

Pantry unit, Cross section 76,0 x 262,0 mm

Travel path
234 mm

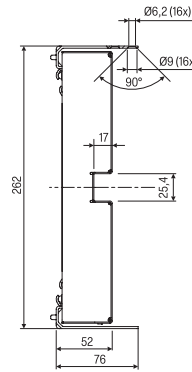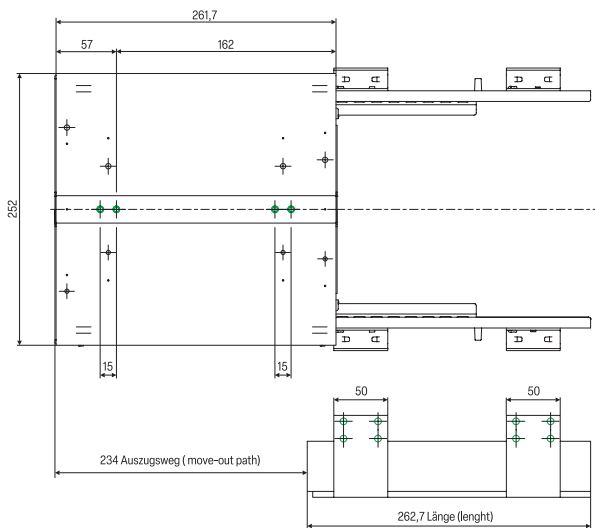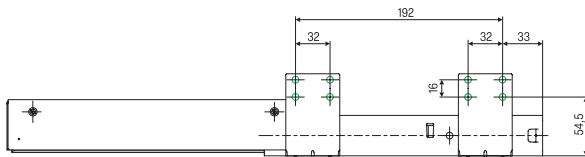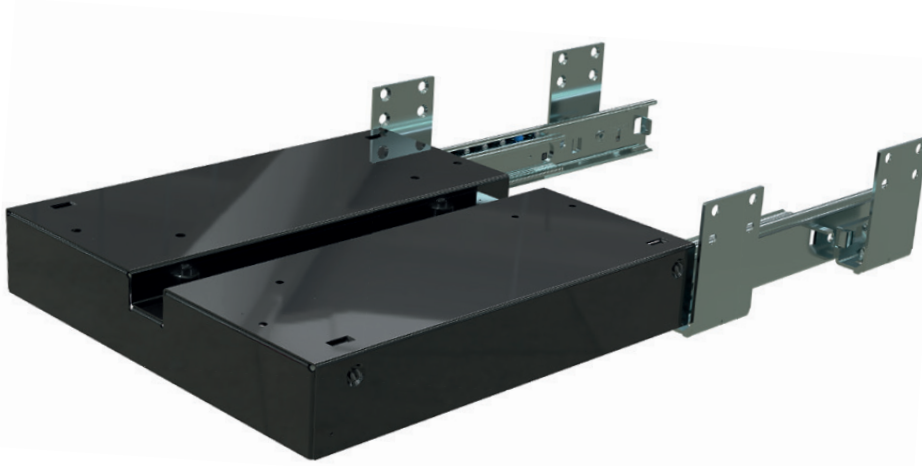

- Load capacity up to 35 kg
- Mounting bracket with front adjustment
- Optional soft-close 50 mm
- Cover powder-coated RAL 7016

Materials and surfaces:

- Slides Zinc-magnesium surface (ZM100)
- Ball cage Zinc-magnesium surface (ZM70)
- Balls made of hardened carbon steel

Temperature range:

- Operating temperature -20°C bis +70°C
- Operating temperature with Soft-Close +10°C up to +40°C

Article no.	Price €/net per piece	TK / kg 10.000 Cycles	LA mm	AZ mm	Additional features	Weight kg/piece
20920263000	112,65	35	262,7	234	-	2,40
20920263060	128,77	35	262,7	234	Soft-close	2,50

Additional features

Article no.	Description
	Führungsschiene oben Art.-Nr.: 20400250000

INBOX 200/210

Load capacity Up to 20 kg

Pantry unit, Cross section 37,0 x 125,0 mm

Travel path

255 mm

300 mm




- Load capacity up to 20 kg
- Mounting bracket with front adjustment
- Optional soft-close 50 mm
- Cover powder-coated RAL 7016

Materials and surfaces:

- Zinc-magnesium surface slide (ZM100)
- Ball cage Zinc-magnesium surface (ZM70)
- Balls made from hardened carbon steel

Temperature range:

- Operating temperature -20°C bis +70°C
- Operating temperature with Soft-Close +10°C up to +40°C

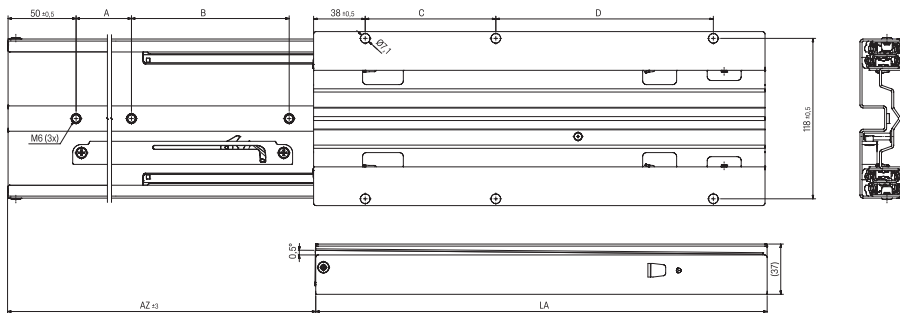

Article no.	Price €/net per piece	Description	TK / kg 10.000 Cycles	LA mm	AZ mm	A	B	C	D	Weight kg/piece
20930285000	156,39	INBOX 200	20	285	255	92,5	92,5	72,5	136,5	2,15
20930332000	166,39	INBOX 210	20	332	300	116	116	96	160	2,35

Additional features

Article no.	Price €/net per piece	Description
21930332060	16,12	Soft-close
21930332990	3,34	Your customer logo

Individual Solutions for maximum Comfort.

SCHOCK has been a successful innovator and manufacturer of ball bearing telescopic slides and linear runner systems for decades. Our products impress with their precision, high load values and long service life.

Based on individual customer requirements, we develop and manufacture ball bearing slides as slider guides, partial-extension, full-extension or over-extension slides.

We work together with our customers to define the product requirements of the telescopic slides. Our customers benefit from a large selection of rail profiles, fastening systems, comfort functions and surface finishes.

Advantages that convince:

- Excellent running properties
- High functional reliability
- Long service life without maintenance
- Various connection options
- Customized adaptations
- 90% vertical range of manufacture

The Heavyweights in Guidance Technology

Schock heavy-duty telescopic slides offer you an impressive variety of precision. Thanks to the highly specialized manufacturing technology, they can be used for almost any application.

These telescopic slides enable loads of **up to 2,500 kilograms** to be moved linearly over a maximum length of **up to 3,000 mm**.

Our heavy-duty slides offer a wide range of material options such as **carbon steel**, **stainless steel** and **aluminum** to meet individual requirements.

With these slides, extensions can be realized that allow travels of up to 200% of the slide length with minimal lowering.

Classic areas of application for these telescopic slide models include space travel, robotics, special vehicle construction and shipbuilding and shipbuilding.

We are happy to advise you and make you an offer.





Schock Metallwerk GmbH
Siemensstraße 1-3
73660 Urbach
Germany

www.schock-group.com